
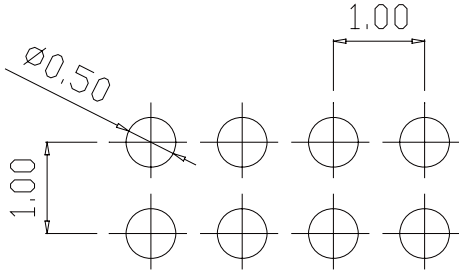
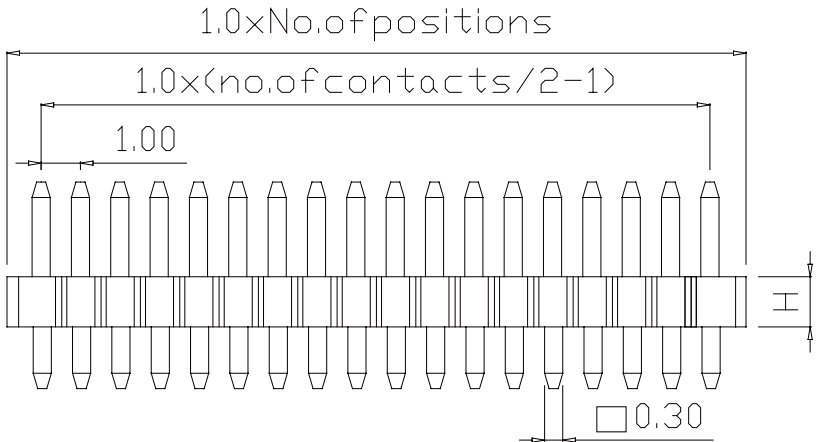



SPECIFICATION


Current Rate: 1 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 30mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
 Standard: Nylon 6T
 Contact Pin: Brass
 Contact Plated: Gold Plated

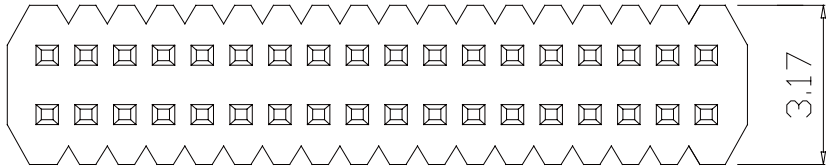

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

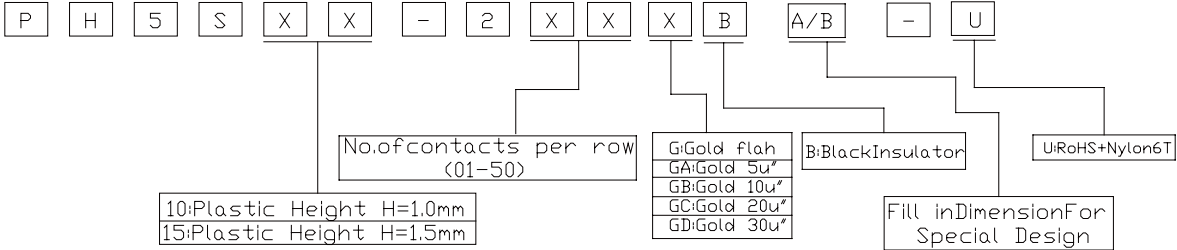

APPRO	CHECK	DRAWN	PART NO.	PH5SXX-2XXXBA/B-U		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com

