
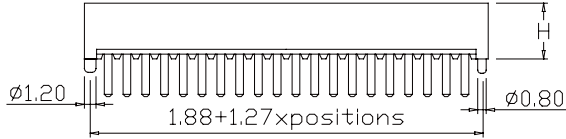




SPECIFICATION

Curent Rate: 1 AMP
 Insulation Rrsistance: 1000mΩMin
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 300V AC for one minute
 Operation Temperature: -40°C to +105°C




MATERIAL

Insulator: Polyester,UL94v-0
 Standard: Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

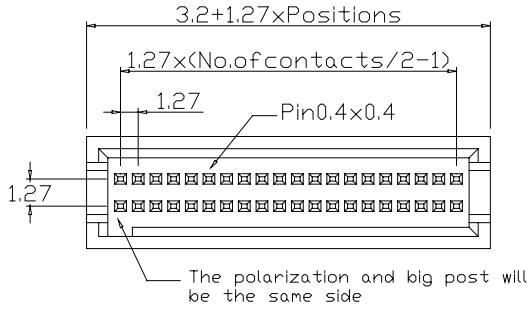


Plastic Height

| CODE | HEIGHT | CODE | HEIGHT |
|------|--------|------|--------|
| A | 5.7 | M | 17.3 |
| B | 7.3 | N | 3.8 |
| C | 9.4 | P | 9.0 |
| D | 9.6 | Q | 10.2 |
| E | 10.3 | R | 10.4 |
| F | 11.0 | S | 10.7 |
| G | 11.2 | T | 14.1 |
| H | 11.5 | U | 15.6 |
| I | 12.2 | V | 17.6 |
| J | 13.5 | W | 18.6 |
| K | 14.2 | X | 18.9 |
| L | 15.2 | Y | 19.3 |

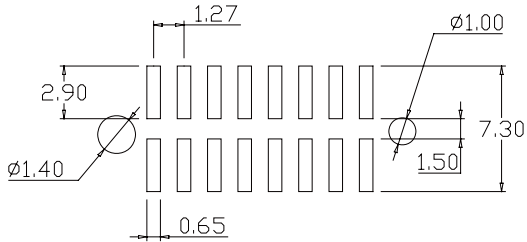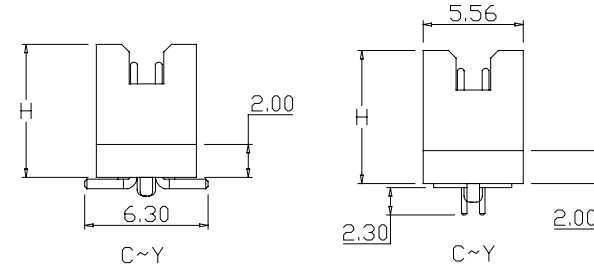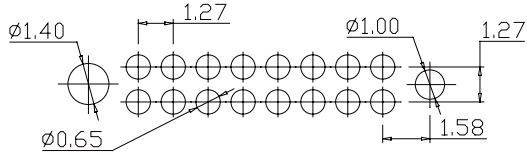

Recommended PCB Layout
 (PCB YDLERANCE±0.05)

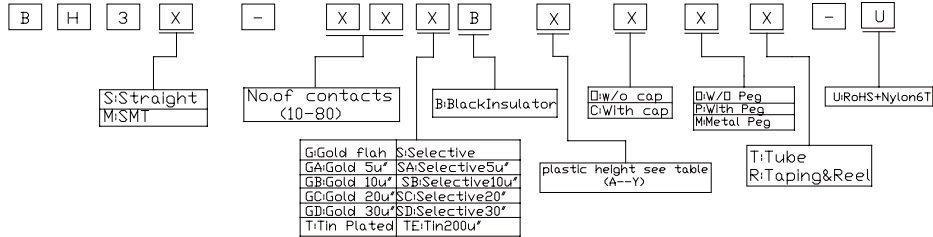

| | | | | | | |
|-------|-------|-------|----------|-----------------|-------|----|
| APPRO | CHECK | DRAWN | PART NO. | BH3X-XXXBXXXX-U | | |
| | | | ITEM NO. | | | |
| | | | DRAW NO. | | | |
| | | | UNIT | mm | SCALE | no |
| | | | TOLER | | NO. | |

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com

