
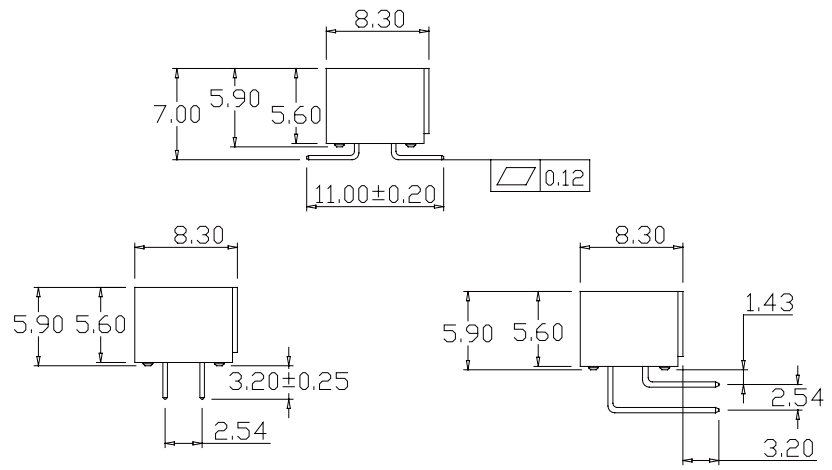



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,7,31	1.0

**SPECIFICATION**  
 Current Rate: 1 AMP  
 Insulation Resistance: 1000mΩ Min  
 Contact Resistance: 20mΩ Max  
 Dielectric voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C


**MATERIAL**  
 Insulator: Polyester, UL94v-0  
 Standard: Nylon 6T  
 Contact Pin: Brass  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

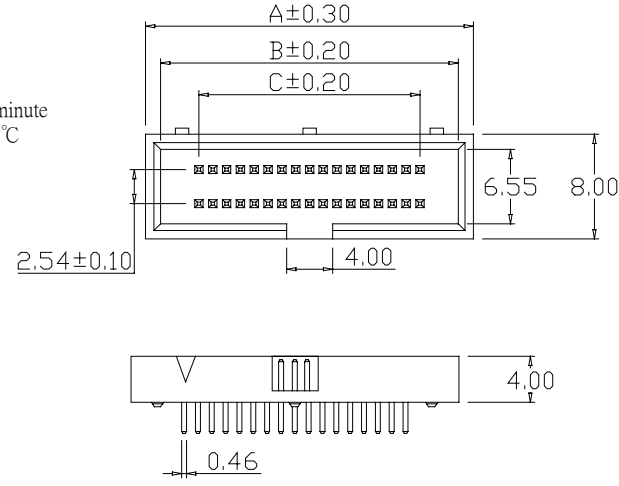

POS.	DIMENSION		
	A	B	C
6	11.81	10.21	2.54
8	13.08	11.48	3.81
10	14.35	12.75	5.08
12	15.62	14.02	6.35
14	16.89	15.29	7.62
16	18.16	16.56	8.89
18	19.43	17.83	10.16
20	20.70	19.10	11.43
26	24.51	22.91	15.24
30	27.05	25.45	17.78
34	29.59	27.99	20.32
40	33.40	31.80	24.13
50	39.75	38.15	30.48
60	46.10	44.50	36.83
64	48.64	47.04	39.37

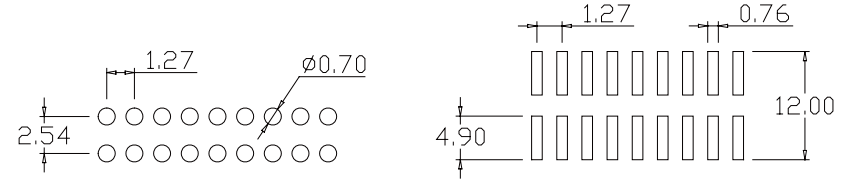

Recommended PCB Layout  
 (PCB TOLERANCE±0.05)

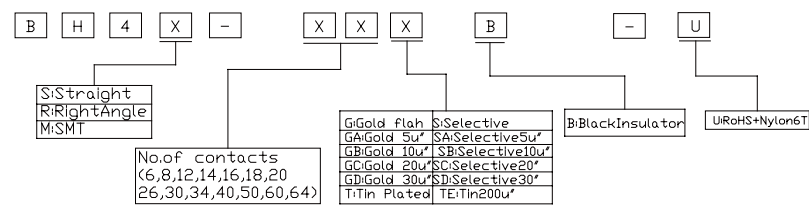

APPRO	CHECK	DRAWN	PART NO.	BH4X-XXXB-U		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

