PAGE	98

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,8,1	1.0

SPECIFICATION
Curerent Rate: 1.5 AMP
Insulation Rrsistance: 1000mΩMin
Conract Resistance: 20mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40℃ to +105℃

MATERIAL
Insulator: Polyester,UL94v-0
◎Sandard: Nylon 6T
Conract Pin: Brass
Finish: Tin, Gold Plated
◎Sandard: Gold Flash all over

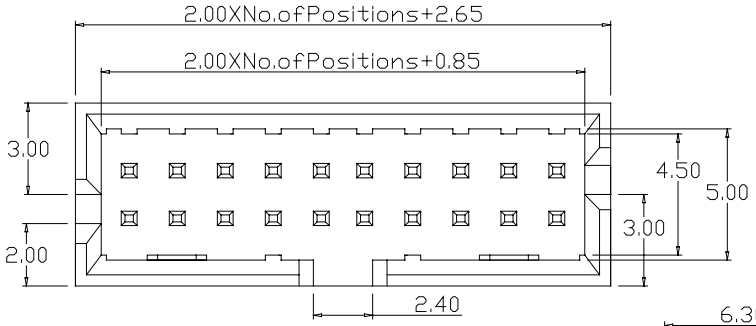







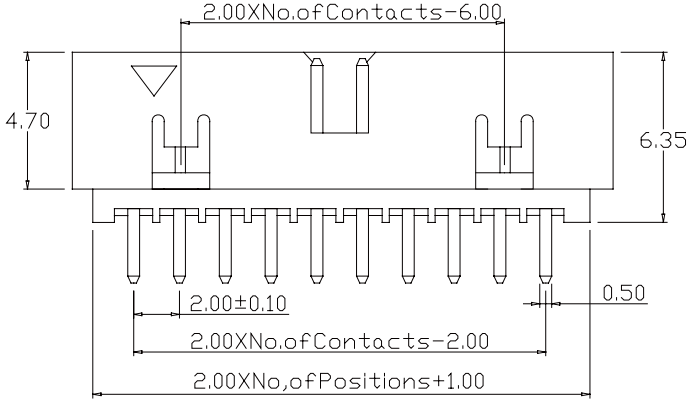





Recommended PCB Layout
(PCB TOLERANCE±0.05)

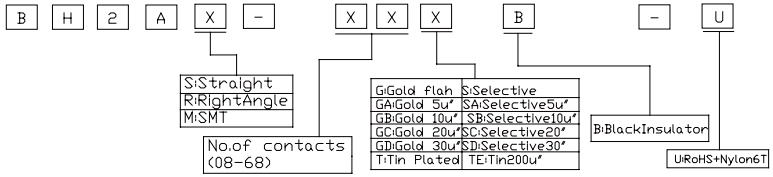

APPRO	CHECK	DRAWN	PART NO.	BH2AX-XXXB-U			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com