




| | | | | |
|-------|-----|-------------------------------|----------|------|
| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |
| ALLEN | | RELEASE TO PRODUCTION | 2007,8,4 | 1.0 |

SPECIFICATION

Current Rate: 3 AMP
 Insulation Rrsistance: 1000mΩMin
 Contact Resistance: 20mΩMax
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: Polyester,UL94v-0
 Standard: Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

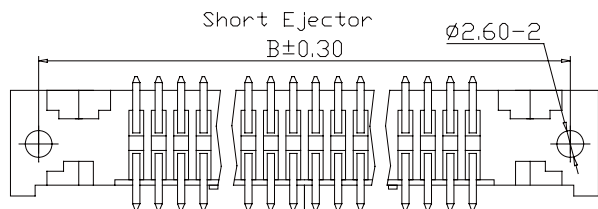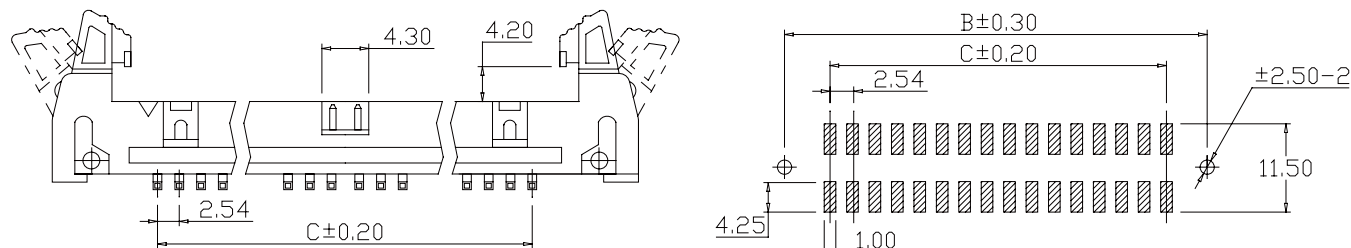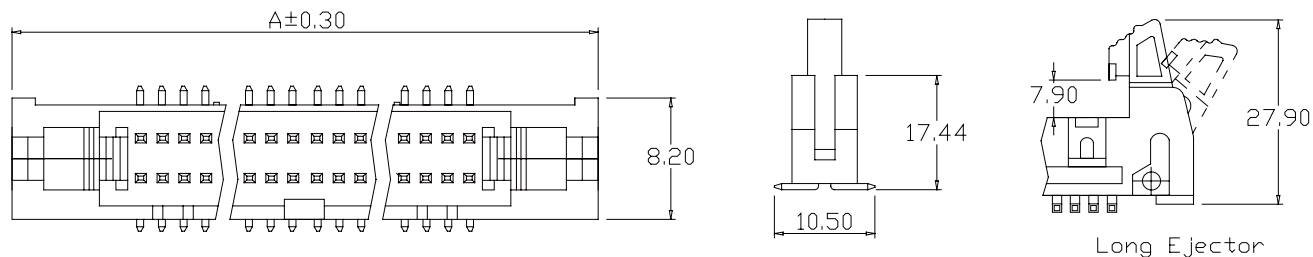

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

| Dimensions | | | |
|------------|-------|-------|-------|
| Pos. | A | B | C |
| 10 | 32.00 | 27.94 | 10.16 |
| 14 | 37.08 | 33.02 | 15.24 |
| 16 | 39.62 | 35.56 | 17.78 |
| 20 | 44.70 | 40.64 | 22.86 |
| 24 | 49.78 | 45.72 | 27.94 |
| 26 | 52.32 | 48.26 | 30.48 |
| 30 | 57.40 | 53.34 | 35.56 |
| 34 | 62.48 | 58.42 | 40.64 |
| 40 | 70.10 | 66.04 | 48.26 |
| 50 | 82.80 | 78.74 | 60.96 |

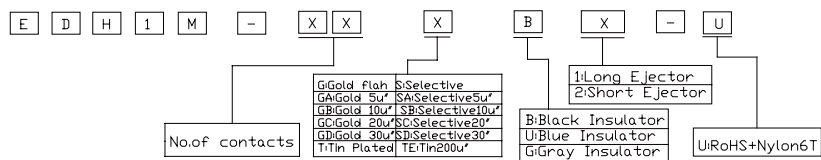

| | | | | | | |
|-------|-------|-------|--|---------------|-------------|--|
| APPRO | CHECK | DRAWN | PART NO. | EDH1M-XXXBX-U | DESCRIPTION | |
| | | | ITEM NO. | | | |
| | | | DRAW NO. | | | |
| | | | UNIT | mm SCALE no | | |
| | | | TOLER | NO. | | |
| | | | Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com | | | |