
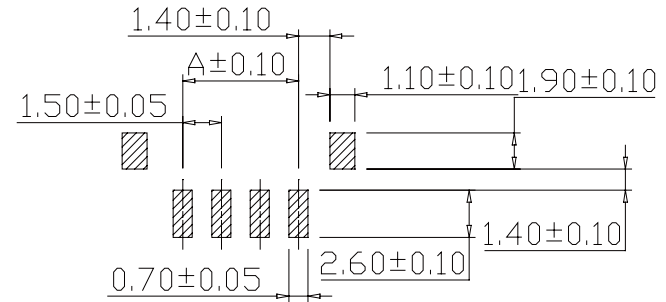



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,3	1.0


SPECIFICATIONS

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 500mΩ Min  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Solder Tabs: Brass/Tin-plated  
 Material: Nylon 6T, UL94V-0  
 Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1500MS-02TW-U	1.50	6.00
1500MS-03TW-U	3.00	7.50
1500MS-04TW-U	4.50	9.00
1500MS-05TW-U	6.00	10.50
1500MS-06TW-U	7.50	12.00
1500MS-07TW-U	9.00	13.50
1500MS-08TW-U	10.50	15.00
1500MS-09TW-U	12.00	16.50
1500MS-10TW-U	13.50	18.00
1500MS-11TW-U	15.00	19.50
1500MS-12TW-U	16.50	21.00
1500MS-13TW-U	18.00	22.50

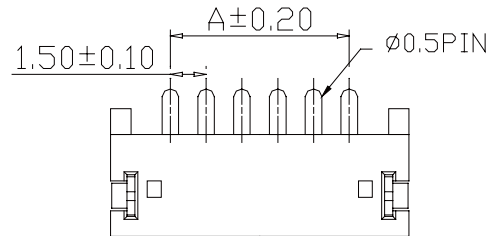

P.C.B LAYOUT

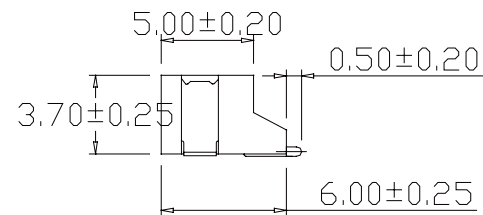

PartNo.: 1500M R-XXTW -U

APPRO	CHECK	DRAWN	PART NO.	Part No.1500MR-XXTW-U	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm		
			TOLER		NO.	
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com						