
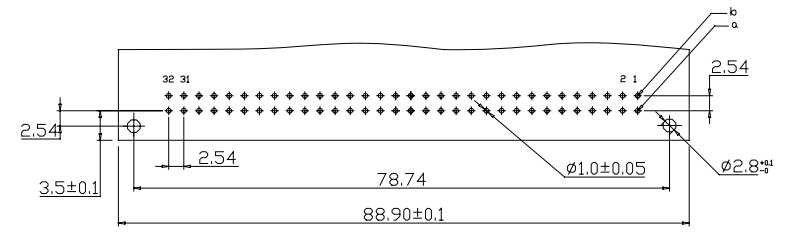





BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION
 Current Rate: 2 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 30mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C


MATERIAL
 Insulator: Polyester, UL 94V-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze

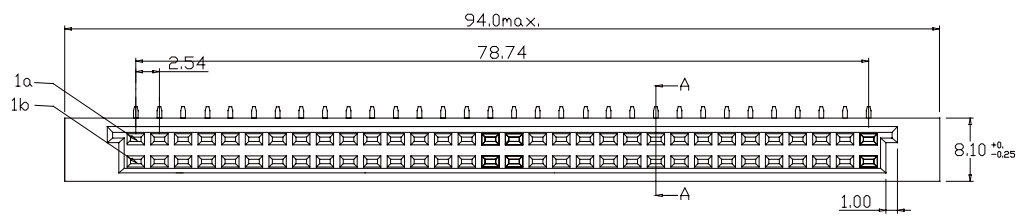

RECOMMENDED P.C. BOARD LAYOUT

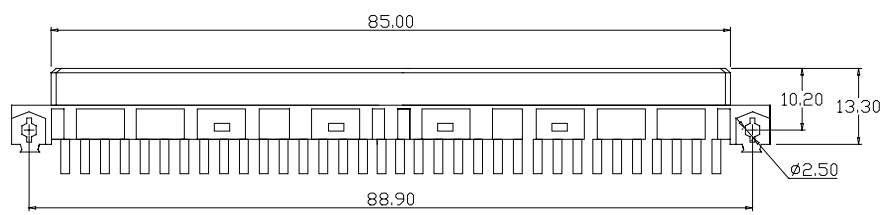

SEC A-A

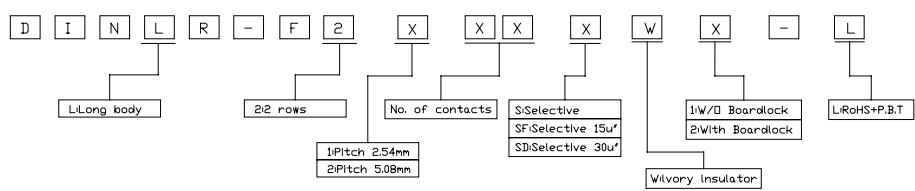

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/POSITIONS WITH CONTACT	PITCH
64	a+b	2.54mm
32	a	2.54mm
32	a+b ALL EVEN NO.	5.08mm
16	a ALL EVEN NO.	HALF-LOADED

APPRO	CHECK	DRAWN	PART NO.	DINLR-F2XXXXWX-L			
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

DESCRIPTION

