


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

**SPECIFICATION**  
 Current Rate: 2 AMP  
 Insulation Resistance: 1000mΩMin  
 Contact Resistance: 30mΩMax  
 Dielectric voltage: 1000V AC for one minute  
 Operation Temperature: -55°C to +105°C

**MATERIAL**  
 Insulator: Polyester, UL 94V-0  
 Standard: P.B.T  
 Contact Pin: Phosphor Bronze

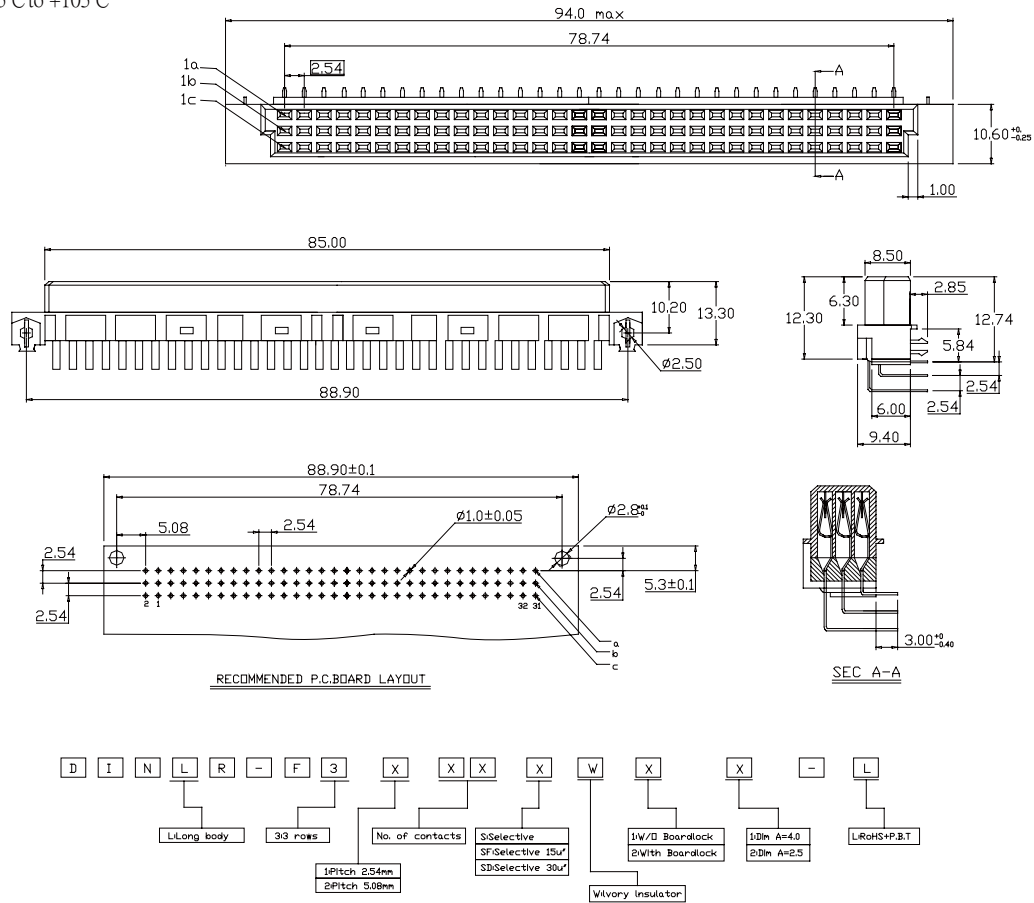

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/SIDITIONS WITH CONTACT	PITCH
96	a+b	2.54mm
64A	a	
64B	a+b ALL EVEN NO.	
32	a+b	5.08mm HALF-LOADED
48	a	
32	a+b ALL EVEN NO.	

APPRO	CHECK	DRAWN	PART NO.	DINLR-F3XXXXWX-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com