




BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 30mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 Standard: P.B.T
 Contact Pin: Brass

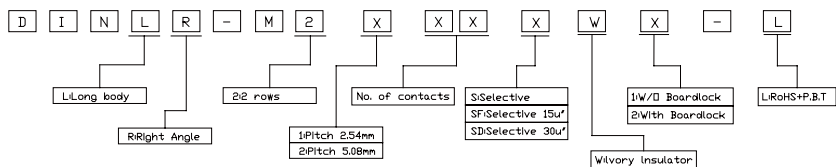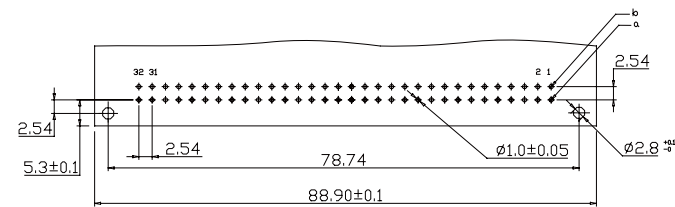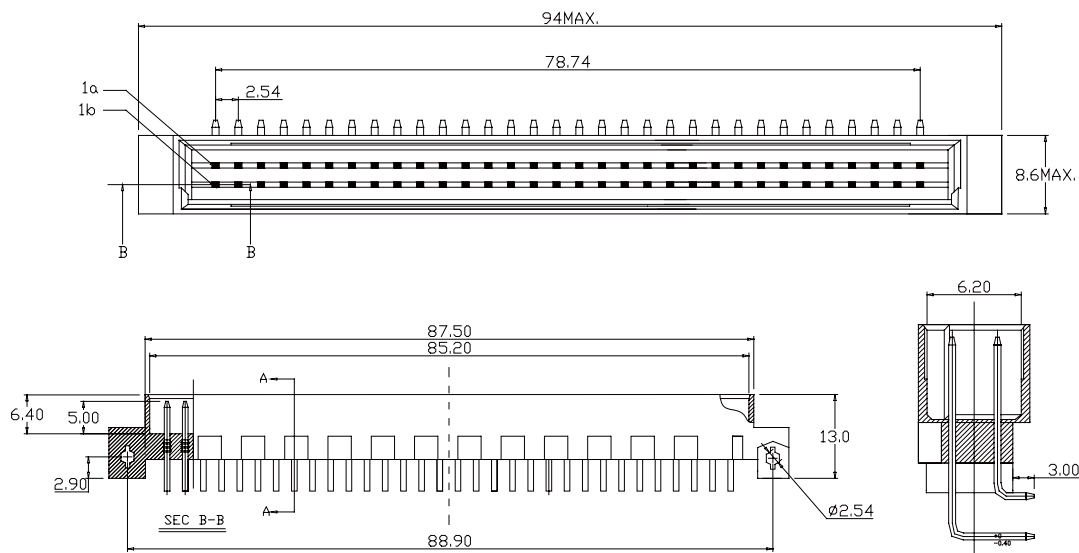

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/SPOSITIONS WITH CONTACT	PITCH
64	a+b	2.54mm
32	a	2.54mm
32	a+b ALL EVEN NO.	5.08mm
16	a ALL EVEN NO.	HALF-LOADED

APPRO	CHECK	DRAWN	PART NO.	DINLR-M2XXXXWX-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

Tel: 0769 2202068 Fax: 0769 2202069 E-mail: sales@vigortec.com