
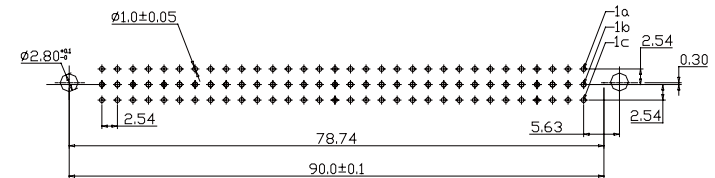


**SPECIFICATION**


Current Rate: 2 AMP  
 Insulation Resistance: 1000mΩ Min  
 Contact Resistance: 30mΩ Max  
 Dielectric voltage: 1000V AC for one minute  
 Operation Temperature: -55°C to +105°C

**MATERIAL**

Insulator: Polyester, UL 94V-0  
 Standard: P.B.T  
 Contact Pin: Phosphor Bronze

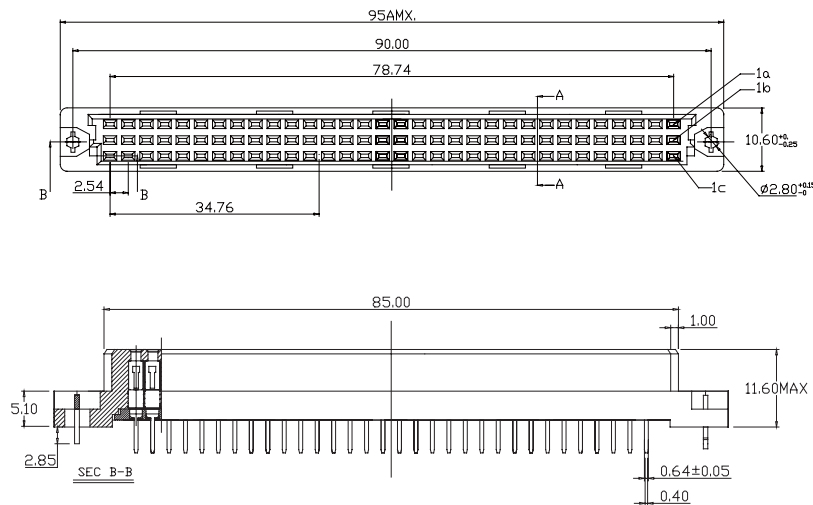


RECOMMENDED P.C. BOARD LAYOUT

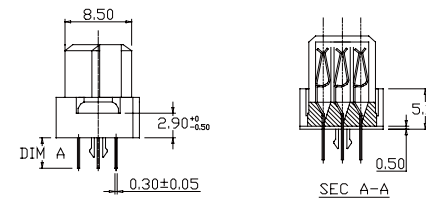

ORDERING INFORMATION

NUMBER OF CONTACTS	ROWS/POSITIONS WITH CONTACT	PITCH
96	a+b	2.54mm
64A	a	2.54mm
64B	a+b ALL EVEN NO.	2.54mm
32	a+b	5.08mm
48	a	5.08mm
32	a+b ALL EVEN NO.	5.08mm HALF-LOADED

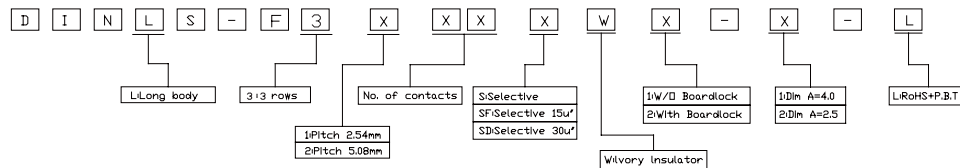

APPRO	CHECK	DRAWN	PART NO.	DINLS-F3XXXXWX-X-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

