

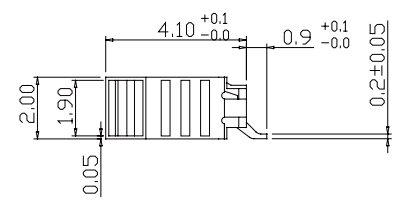
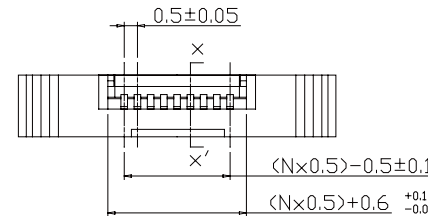



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

**SPECIFICATION**  
 Current Rate: 0.5 AMP  
 Insulation Resistance: 50mΩ Min  
 Contact Resistance: 20mΩ Max  
 Dielectric voltage: 250V AC for one minute  
 Operation Temperature: -20°C to +85°C




**MATERIAL**  
 Insulator: Polyester, UL94v-0  
 Standard: Nylon 46  
 Contact Pin: Phosphor Bronze  
 Finish: Tin Plated

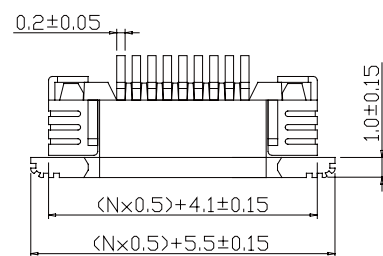


UPPER CONTACT TYPE

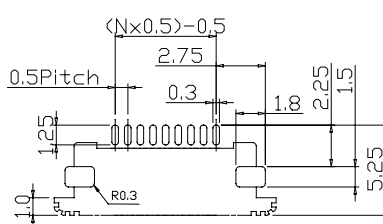

Recommended PCB Layout  
 (PCB TOLERANCE±0.05)

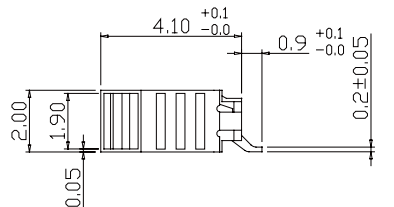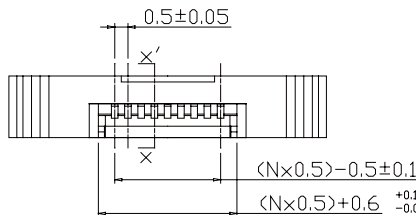

BOTTOM CONTACT TYPE

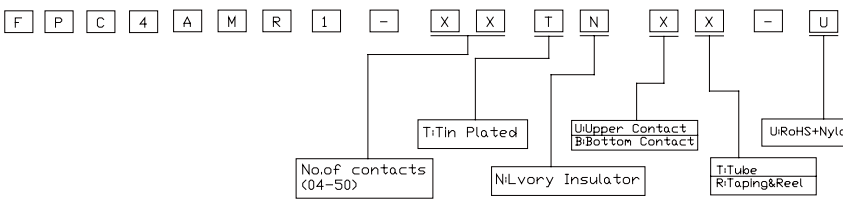

APPRO	CHECK	DRAWN	PART NO.	FPC4AMR1-XXTNXX-U
			ITEM NO.	
			DRAW NO.	
			UNIT	mm SCALE no
			TOLER	NO.

DESCRIPTION