







BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

**SPECIFICATION**

Current Rate: 0.5 AMP  
 Insulation Resistance: 50mΩ Min  
 Contact Resistance: 20mΩ Max  
 Dielectric voltage: 250V AC for one minute  
 Operation Temperature: -20°C to +85°C

**MATERIAL**

Insulator: Polyester, UL94v-0  
 ©Standard: Nylon 6T  
 Contact Pin: Phosphor Bronze  
 Finish: Tin Plated

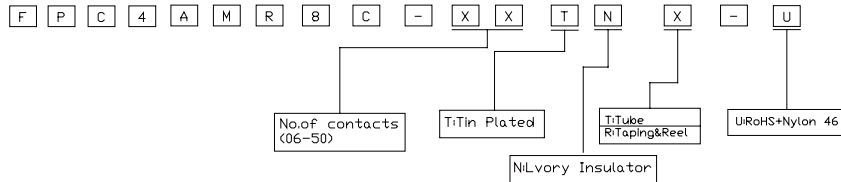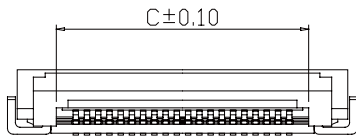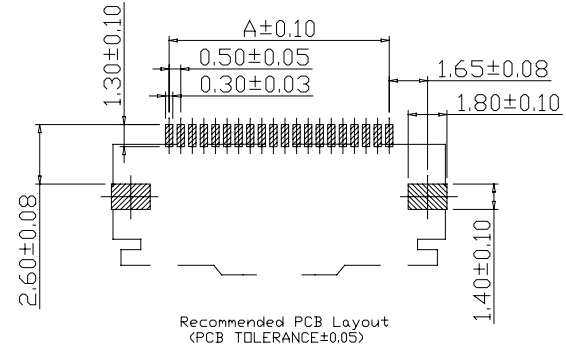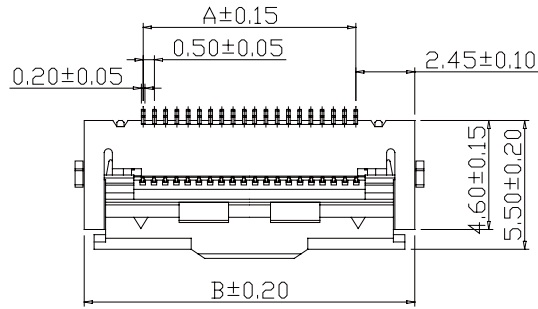

pos.	Dimensions			pos.	Dimensions		
	A	B	C		A	B	C
6	2.50	7.40	3.60	25	12.00	16.90	13.10
7	3.00	7.90	4.10	26	12.50	17.40	13.60
8	3.50	8.40	4.60	27	13.00	17.90	14.10
9	4.00	8.90	5.10	28	13.50	18.40	14.60
10	4.50	9.40	5.60	29	14.00	18.90	15.10
11	5.00	9.90	6.10	30	14.50	19.40	15.60
12	5.50	10.40	6.60	31	15.00	19.90	16.10
13	6.00	10.90	7.10	32	15.50	20.40	16.60
14	6.50	11.40	7.60	33	16.00	20.90	17.10
15	7.00	11.90	8.10	34	16.50	21.40	17.60
16	7.50	12.40	8.60	35	17.00	21.90	18.10
17	8.00	12.90	9.10	36	17.50	22.40	18.60
18	8.50	13.40	9.60	37	18.00	22.90	19.10
19	9.00	13.90	10.10	38	18.50	23.40	19.60
20	9.50	14.40	10.60	39	19.00	23.90	20.10
21	10.00	14.90	11.10	40	19.50	24.40	20.60
22	10.50	15.40	11.60	45	22.00	26.90	23.10
23	11.00	15.90	12.10	50	24.50	29.40	25.60
24	11.50	16.40	12.60				

APPRO	CHECK	DRAWN	PART NO.	FPC4AMR8C-XXTNX-U	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm SCALE no		
			TOLER	NO.		
					Tel: 0769 2202068 Fax: 0769 2202069 E-mail: sales@vigortec.com	