


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,7	1.0

SPECIFICATION


Current Rate: 0.5 AMP
 Insulation Resistance: 50mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 250V AC for one minute
 Operation Temperature: -20°C to +85°C

MATERIAL


Insulator: Polyester, UL94v-0
 Standard: Nylon 46
 Contact Pin: Phosphor Bronze
 Finish: Tin Plated

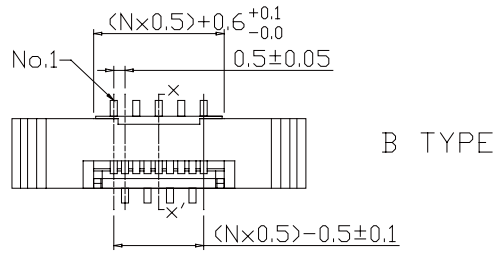


B TYPE

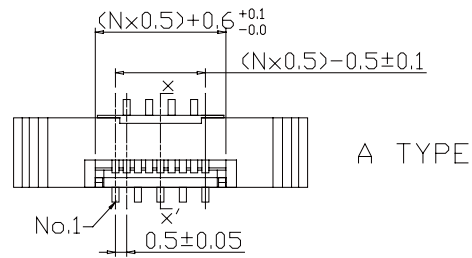


A TYPE



SECT X~X'


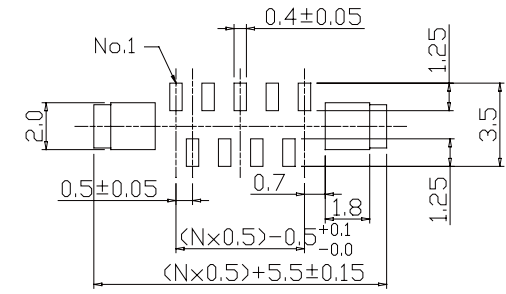


A TYPE

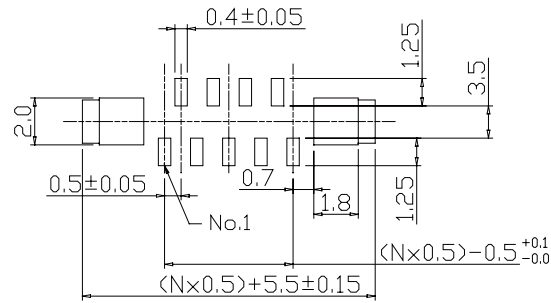

B TYPE

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

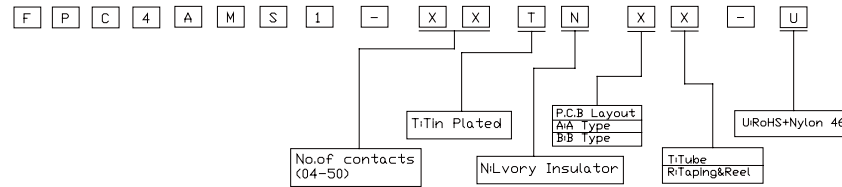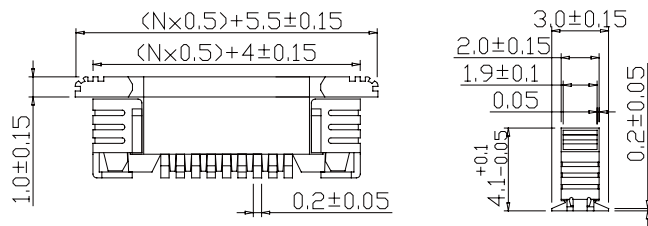

APPRO	CHECK	DRAWN	PART NO.	FPC4AMS1-XXTNXX-U		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

Tel: 0769 2202068 Fax: 0769 2202069 E-mail: sales@vigortec.com

