
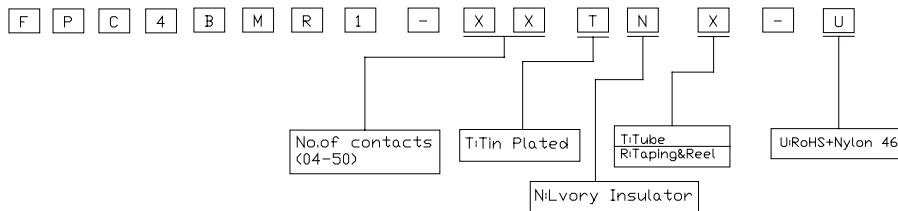
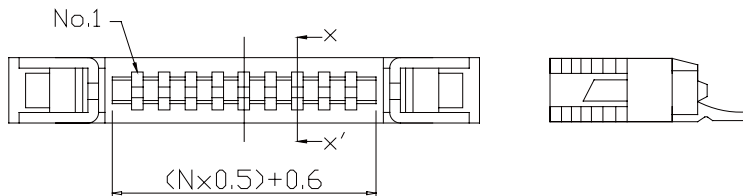
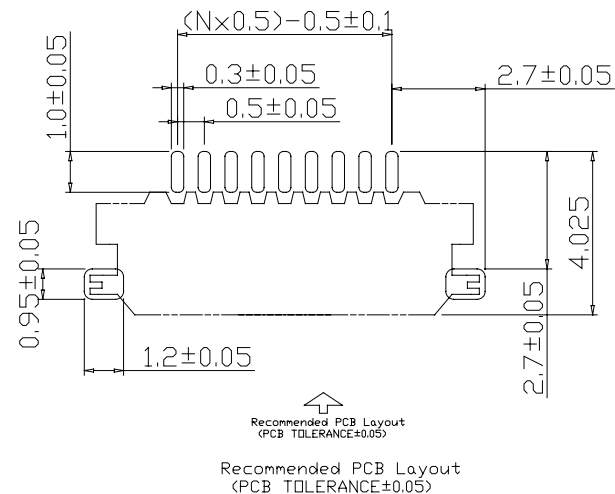



**SPECIFICATION**

Current Rate: 0.5 AMP  
 Insulation Resistance: 50mΩ Min  
 Contact Resistance: 20mΩ Max  
 Dielectric voltage: 250V AC for one minute  
 Operation Temperature: -20°C to +85°C

**MATERIAL**

Insulator: Polyester, UL94v-0  
 Standard: Nylon 46  
 Contact Pin: Phosphor Bronze  
 Finish: Tin Plated

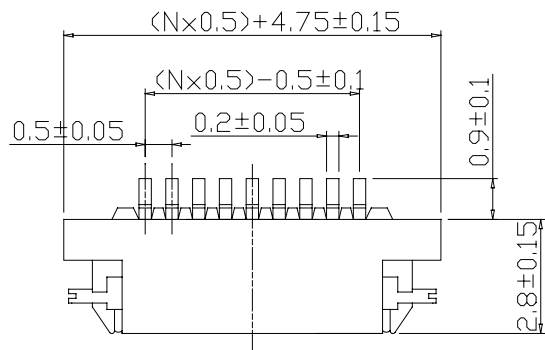

APPRO	CHECK	DRAWN	PART NO.	FPC4BMR1-XXTNX-U		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION