
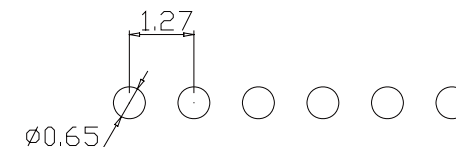


SPECIFICATION



Current Rate: 1 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
 Standard: Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over



Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

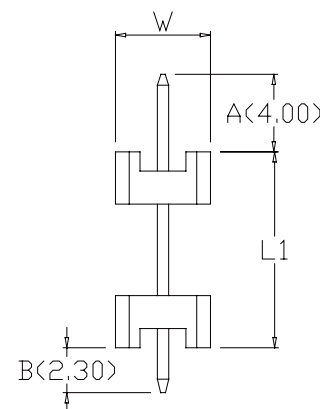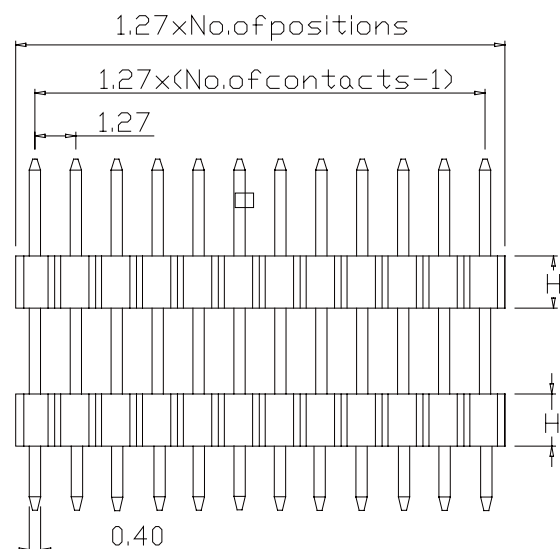

	W
H=1.0	2.1
H=1.5	2.1
H=2.5	2.5

P	H	3	D	X	X	-	1	X	X	X	B	A/L1/B	-	U
---	---	---	---	---	---	---	---	---	---	---	---	--------	---	---

10: Plastic Height H=1.0mm
 15: Plastic Height H=1.5mm
 25: Plastic Height H=2.5mm

No. of contacts per row
 (01-50)

B: Black Insulator

U: RoHS+Nylon 6T

G: Gold flash	S: Selective
GA: Gold 5u"	SA: Selective 5u"
GB: Gold 10u"	SB: Selective 10u"
GC: Gold 20u"	SC: Selective 20u"
GD: Gold 30u"	SD: Selective 30u"
T: Tin Plated	TE: Tin 200u"

Fill in Dimension For Special Design

APPRO	CHECK	DRAWN	PART NO.	PH3DXX-1XXXBA/L1B-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068	Fax: 0769 22020069	E-mail: sales@vigortec.com