
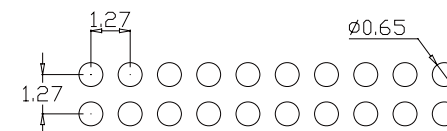


SPECIFICATION



Current Rate: 1 AMP
Insulation Resistance: 1000m Ω Min
Contract Resistance: 20m Ω Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0
 ◎Standard: Nylon 6T
 Contract Pin: Brass
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

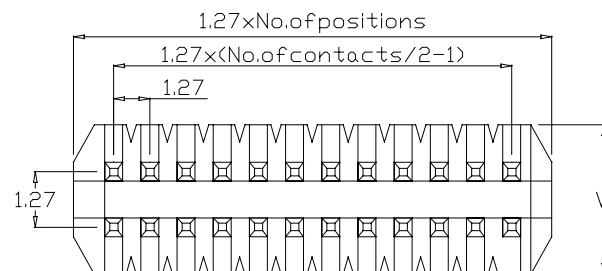

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

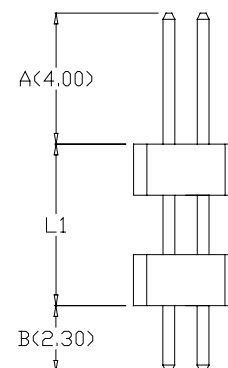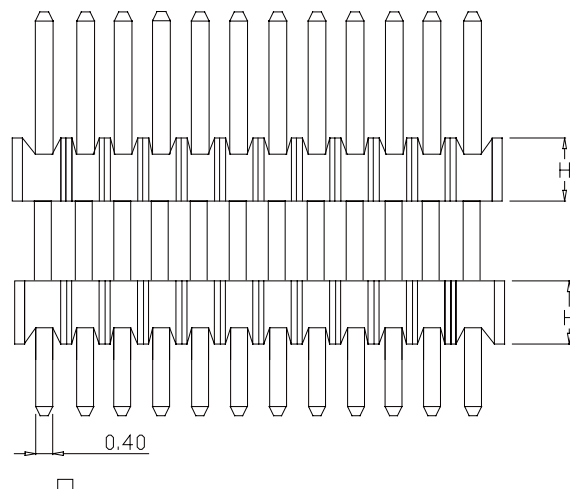

	w
H=0.85	3.40
H=1.0	3.40
H=1.5	3.40
H=1.7	3.00
H=2.0	3.00
H=2.5	3.00

APPRO	CHECK	DRAWN	PART NO.	PH3DXX-2XXXBA/L1B-U		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com