

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL


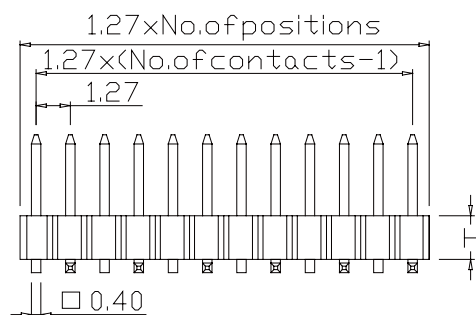
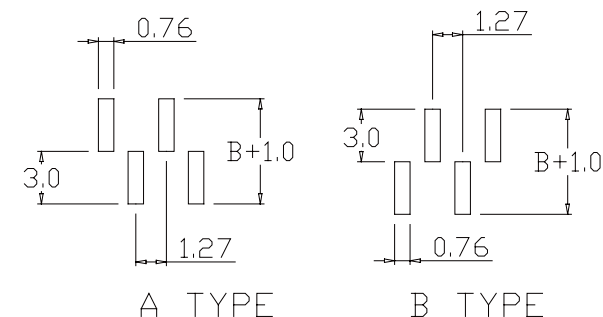
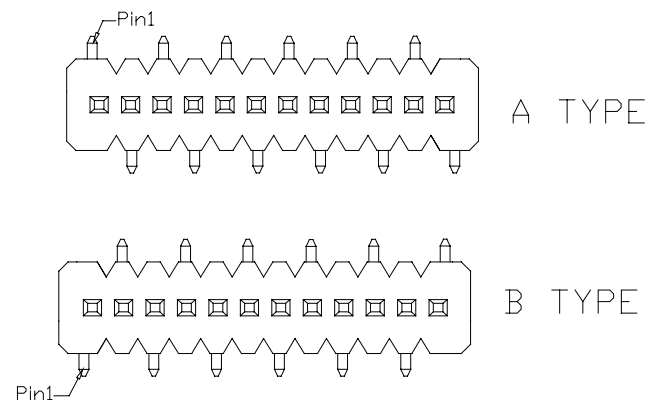
Insulator: Polyester, UL94v-0

Standard: Nylon 6T

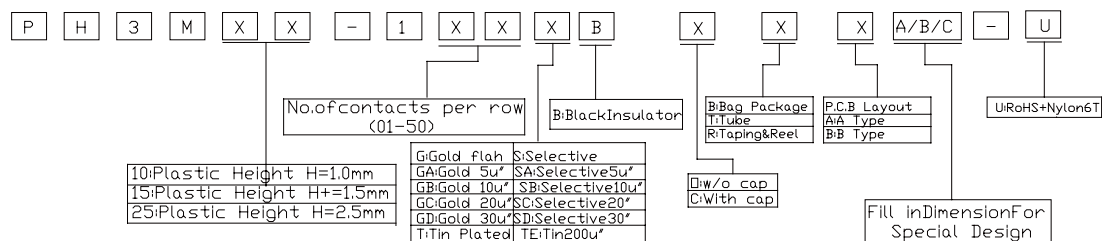
Contact Pin: Brass

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

	C	W
H=1.0	1.5	2.1
H=1.5	2.0	2.1
H=2.5	3.0	2.5



APPRO	CHECK	DRAWN	PART NO.	PH3MXX-1XXXBXXA/B/C-U
			ITEM NO.	
			DRAW NO.	
			UNIT	mm SCALE no
			TOLER	NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com