

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000mΩ Min

Contract Resistance: 20mΩ Max

Dielectric voltage: 500V AC for

Operation Temperature: -40°C to +105°C

MATERIAL



Insulator: Polyester,UL94v-0

©Standard: Nylon 6T



Contract Pin: Brass

Finish: Tin, Gold Plated


©Standard: Gold Flash all over

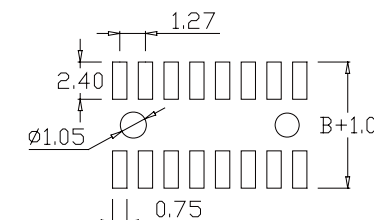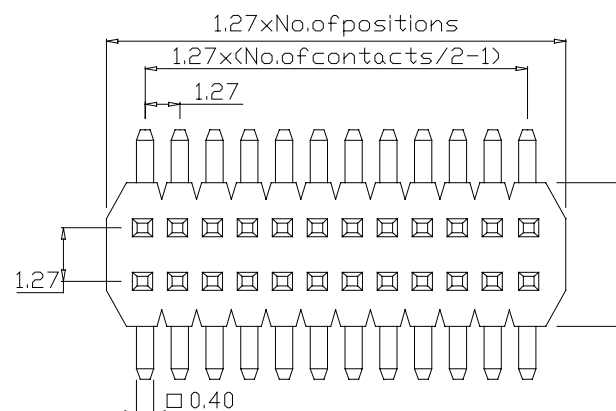

Recommended PCB Layout
(PCB TOLERANCE $\pm 0,05$)

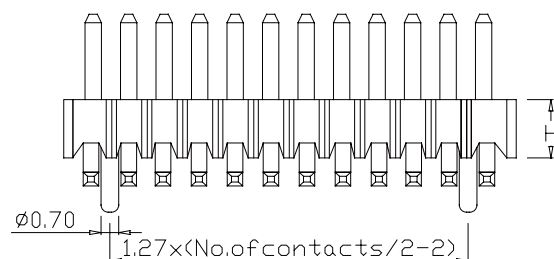

	C	W
H=0,85	1,30	3,40
H=1,0	1,50	3,40
H=1,5	2,00	3,40
H=1,7	2,20	3,00
H=2,0	2,50	3,00
H=2,5	3,00	3,00

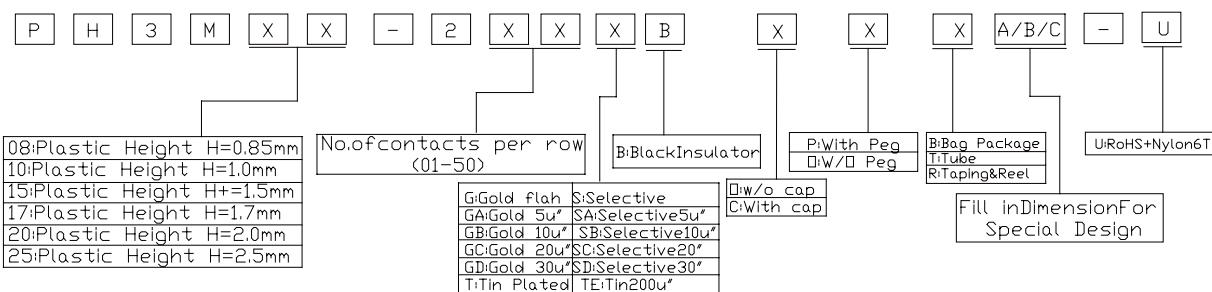

APPRO	CHECK	DRAWN	PART NO.	PH3MXX-2XXXBXXXXA/B/C-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					

