

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

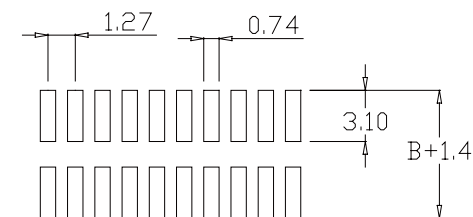
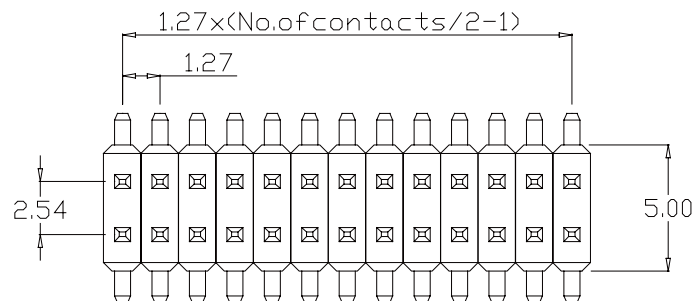

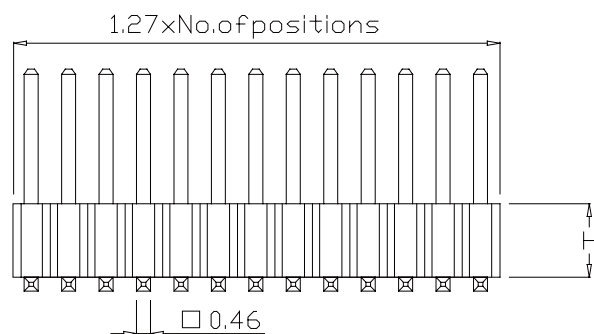
Insulator: Polyester, UL94v-0

Standard: Nylon 6T

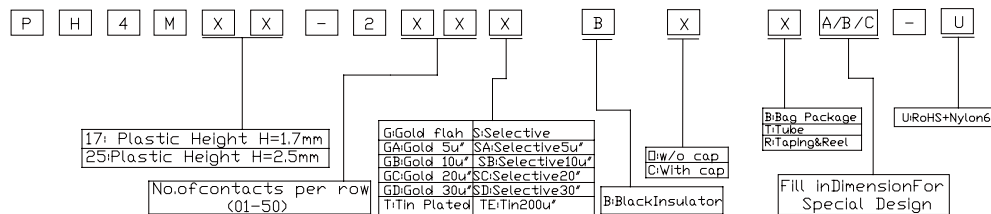
Contact Pin: Brass

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

	C
H=1.7	2.20
H=2.5	3.00



APPRO	CHECK	DRAWN	PART NO.	DESCRIPTION		
			ITEM NO.			
			DRAW NO.			
			UNIT			
			TOLER	mm	SCALE	no
					NO.	