




PAGE	51	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,7,30	1.0

SPECIFICATION


Current Rate: 1 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

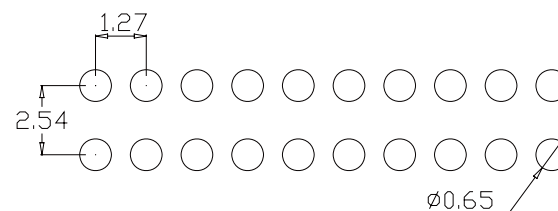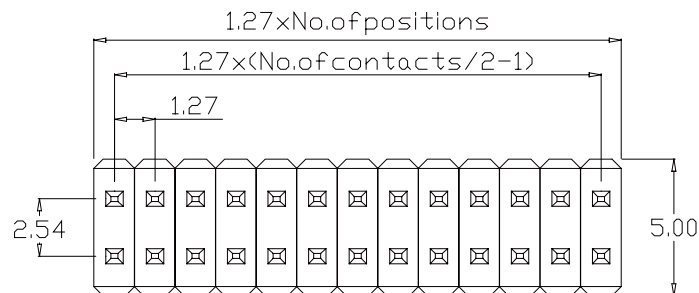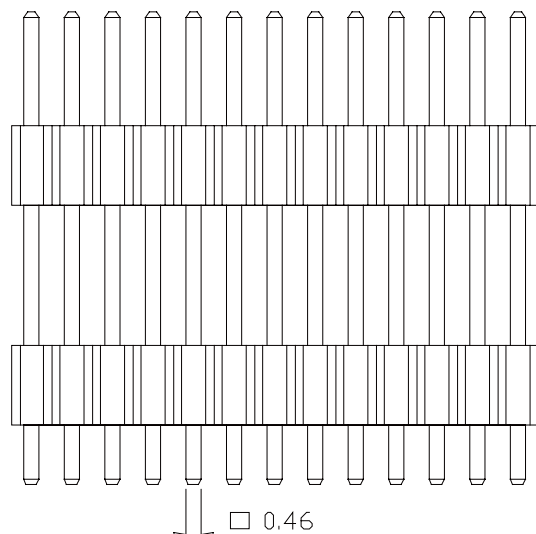

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

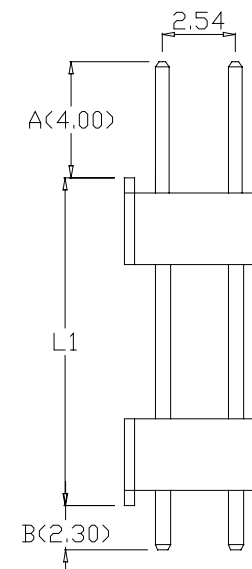

P	H	4	D	X	X	-	2	X	X	X	B	A/L1/B	-	U		
17:Plastic Height H=1.7mm 25:Plastic Height H=2.5mm				No.ofcontacts per row (01-50)				B:BlackInsulator				U:RoHS+Nylon6T				
G:Gold flash GA:Gold 5u" GB:Gold 10u" GC:Gold 20u" GD:Gold 30u" TE: Tin Plated												S:Selective SA:Selective5u" SB:Selective10u" SC:Selective20" SD:Selective30" TE: Tin 200u"		Fill in Dimension For Special Design		

APPRO	CHECK	DRAWN	PART NO.	PH4DXX-2XXXBA/L1/B-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068	Fax: 0769 22020069	E-mail: sales@vigortec.com

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com