

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

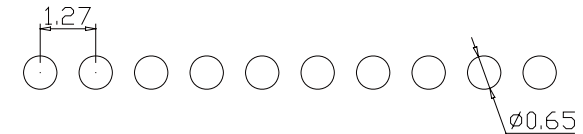
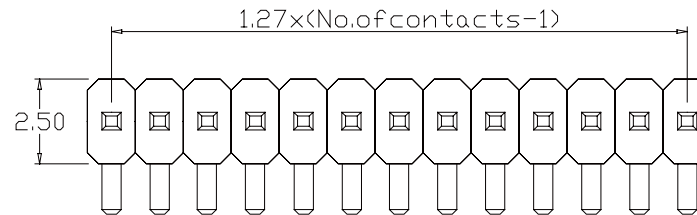

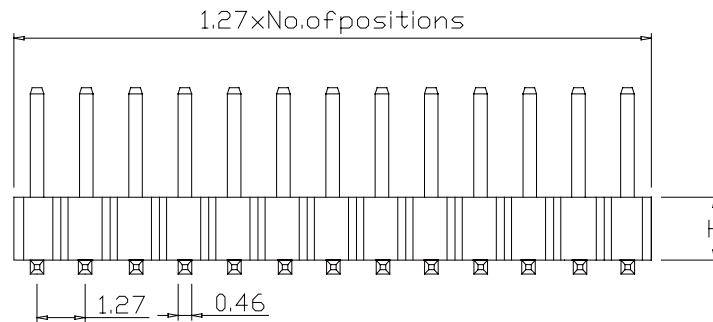
Insulator: Polyester, UL94v-0

Standard: Nylon 6T

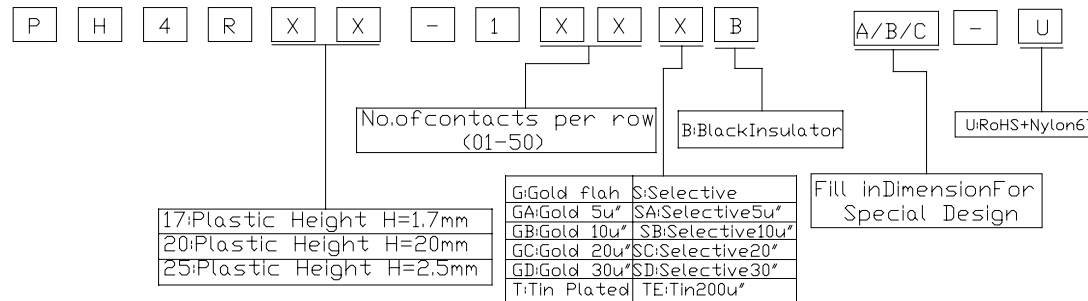
Contact Pin: Brass

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

	C
H=1.7	2.2
H=2.0	2.5
H=2.5	3.0



PH4RXX-1XXXBA/B/C-U

