


SPECIFICATION



Current Rate: 1 AMP
Insulation Resistance: 1000m Ω Min
Contract Resistance: 20m Ω Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Polyester, UL94v-0
 Standard: Nylon 6T
 Contact Pin: Phosphor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

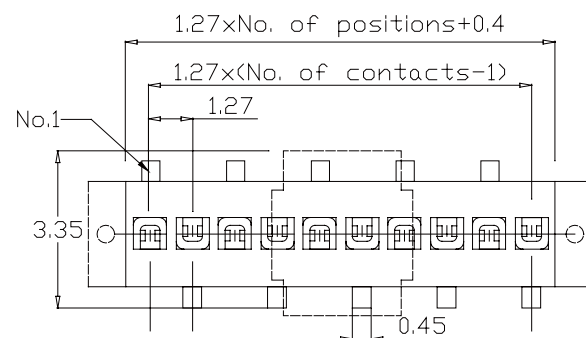


A TYPE

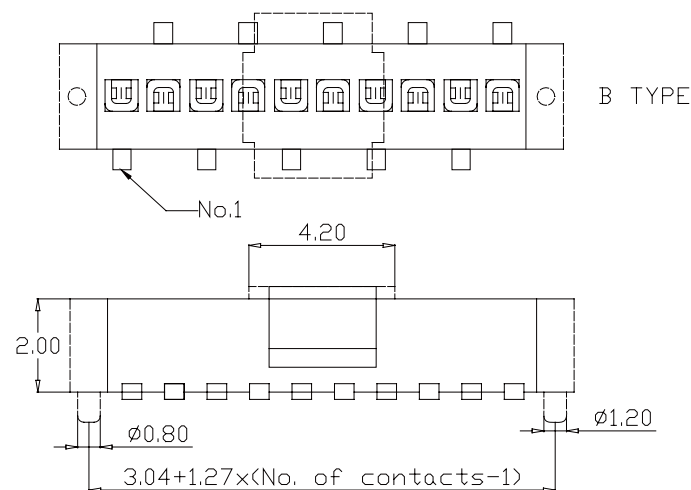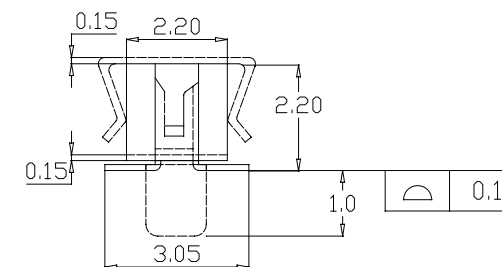

B TYPE

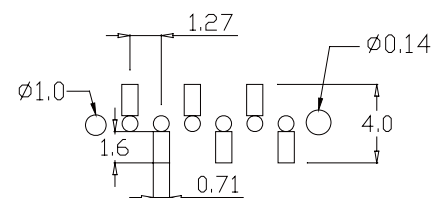


A TYPE

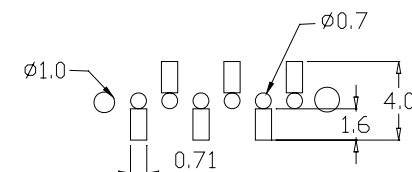

B TYPE

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

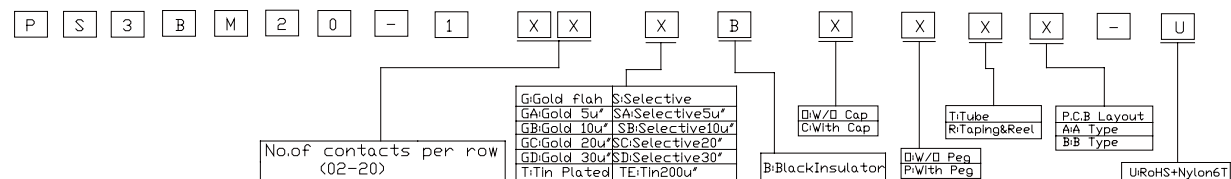

APPRO	CHECK	DRAWN	PART NO.	PS3BM20-1XXXXBXXXX-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com			