



PAGE	74	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,7,31	1.0

SPECIFICATION



Current Rate: 1 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T
Contact Pin: Phosphor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

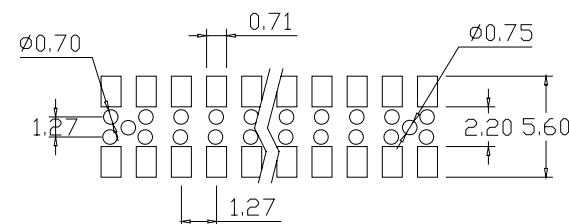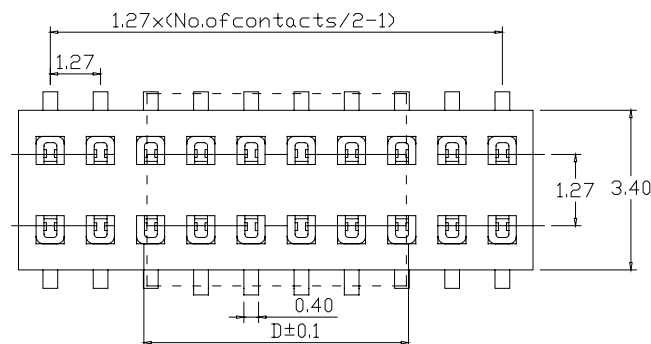


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

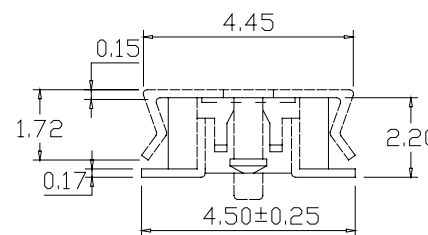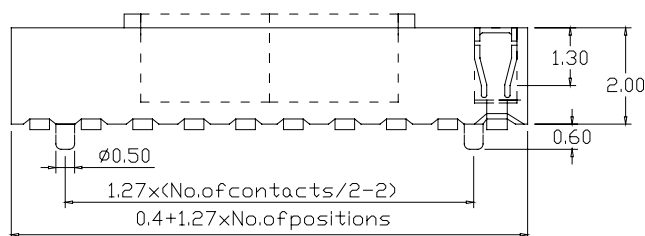

CAP DIM	
POS.	D
2x03-2x08	4.2
2X09-2X30	6.9

P	S	3	B	M	2	0	-	2	X	X	X	B	X	X	X	-	U
No. of contacts per row (03-30)									G:Gold flash		S:Selective	O:W/O Cap		P:With Cap		Ti:Tube	
									GA:Gold 5u"		SA:Selective5u"					R:Tapin & Reel	
									GB:Gold 10u"		SB:Selective10u"						
									GC:Gold 20u"		SC:Selective20u"						
									GD:Gold 30u"		SD:Selective30u"						
									Ti: Tin Plated		TE: Tin200u"						
												B:Black Insulator		D:W/O Peg		B:With Peg	
																U:RoHS+Nylon6T	

APPRO	CHECK	DRAWN	PART NO.	OR2AL1/ , 1WWWAWWW, T			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	