





|      |    |       |     |                               |          |      |
|------|----|-------|-----|-------------------------------|----------|------|
| PAGE | 78 | BY    | CHK | REVISION RECORD MODIFICATIONS | DATE     | REV. |
|      |    | ALLEN |     | RELEASE TO PRODUCTION         | 2007,8,1 | 1.0  |

SPEC I FICATION


Curerent Rate: 1 AMP  
Insulation Rrsistance: 1000mΩMin  
Conract Resistance: 20mΩMax  
Dielectric voltage: 500V AC for one minute  
Operation Temperature: -40℃ to +105℃

M A T E R I A L

Insulator: Polyester,UL94v-0  
©Standard: Nylon 6T  
Conract Pin: Phospor Bronze  
Finish: Tin, Gold Plated  
©Standard: Gold Flash all over

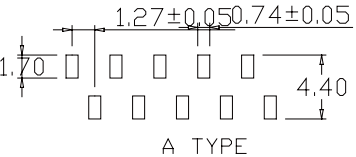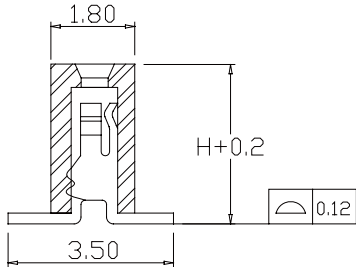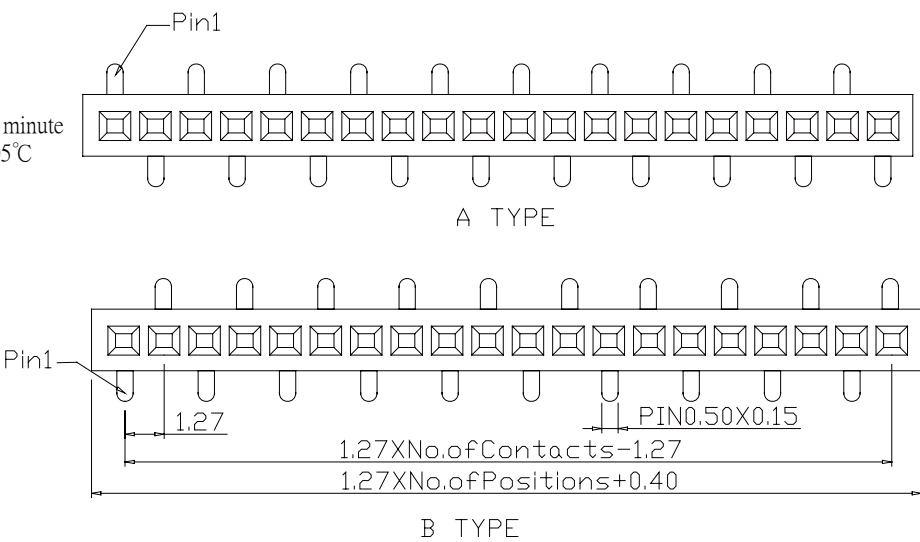

Recommended PCB Layout  
(PCB YOLERANCE±0.05)

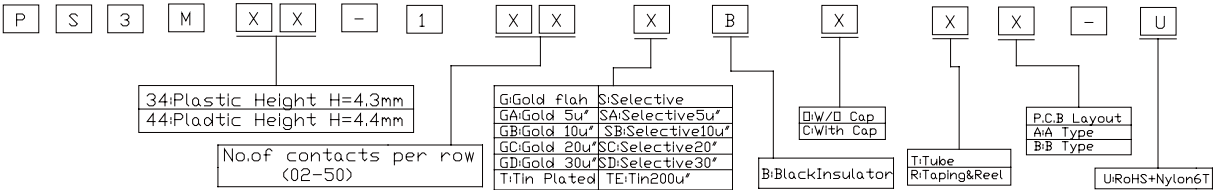

|                                                                 |       |       |          |                   |             |  |
|-----------------------------------------------------------------|-------|-------|----------|-------------------|-------------|--|
| APPRO                                                           | CHECK | DRAWN | PART NO. | PS3MXX-1XXXBXXX-U | DESCRIPTION |  |
|                                                                 |       |       | ITEM NO. |                   |             |  |
|                                                                 |       |       | DRAW NO. |                   |             |  |
|                                                                 |       |       | UNIT     | mm                |             |  |
|                                                                 |       |       | TOLER    | SCALE             |             |  |
|                                                                 |       |       |          | NO.               |             |  |
| Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com |       |       |          |                   |             |  |