

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000m Ω MinContact Resistance: 20m Ω Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

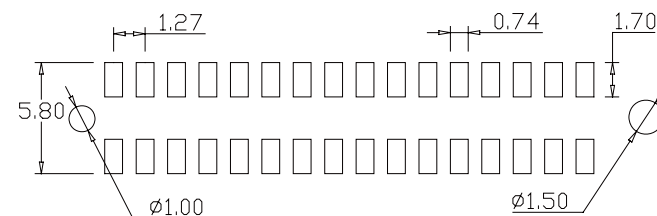
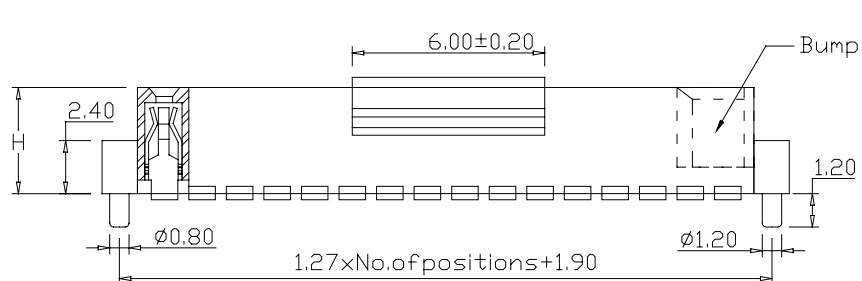
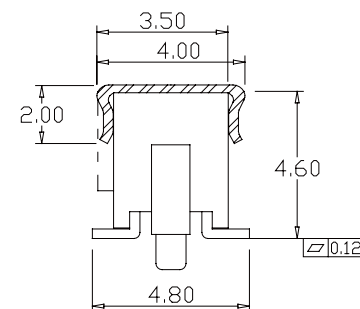
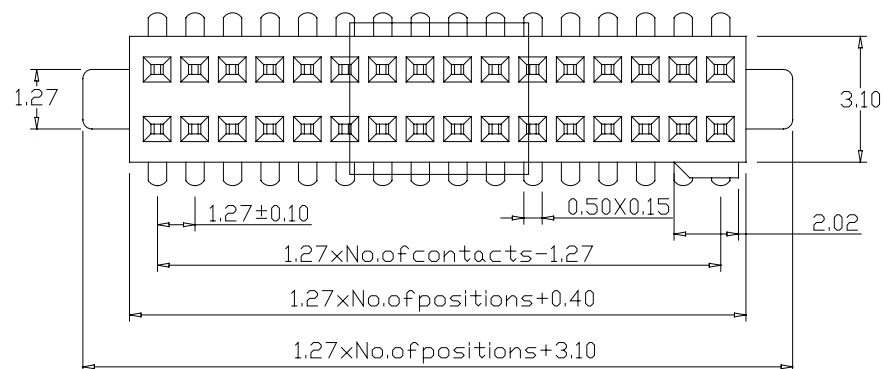
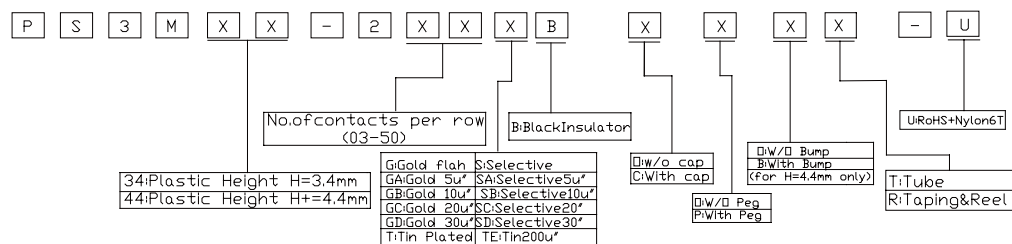
Insulator: Polyester, UL94v-0

Standard: Nylon 6T

Contact Pin: Phosphor Bronze

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE±0.05)

APPRO	CHECK	DRAWN	PART NO.	PS3MXX-2XXXBXXXX-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER	NO.	Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com			

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com