





PAGE	75	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,1	1.0

SPECIFICATION


Current Rate: 1 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T
Contact Pin: Phosphor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

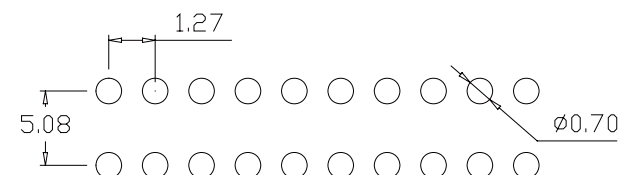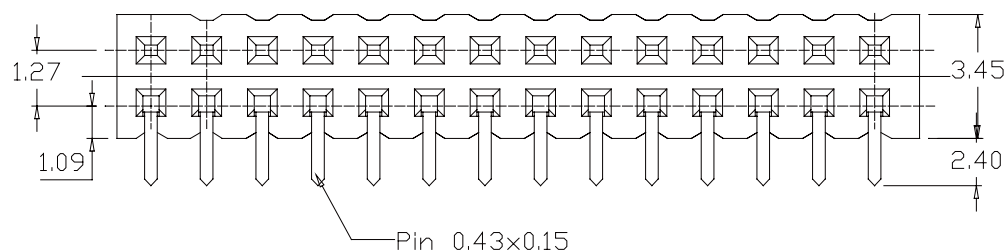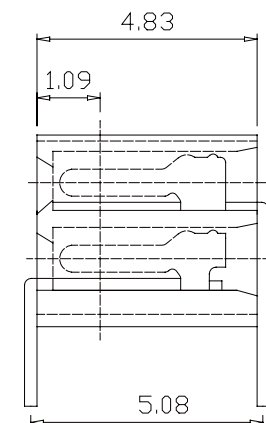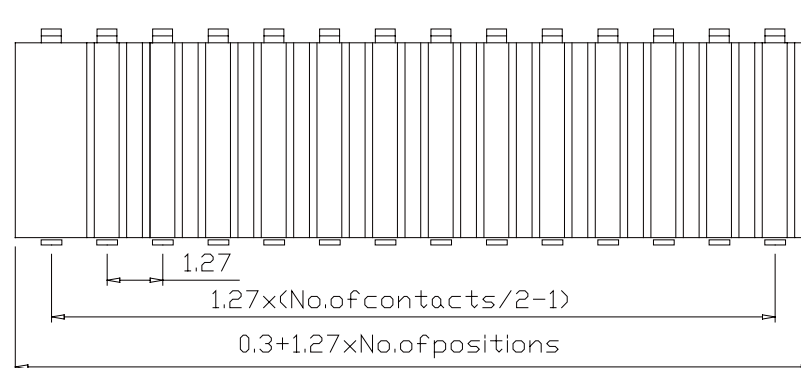

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

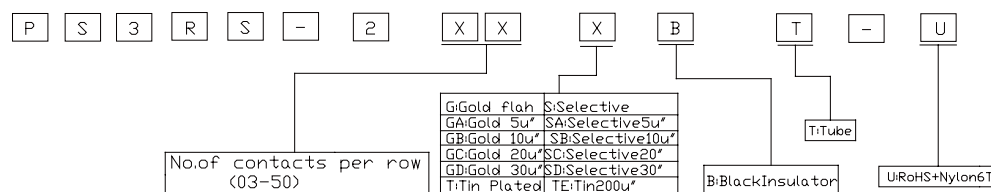

APPRO	CHECK	DRAWN	PART NO.	PS3RS-2XXXBT-U	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	
			TOLER	NO.	no	

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com