


SPECIFICATION




Current Rate: 1 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

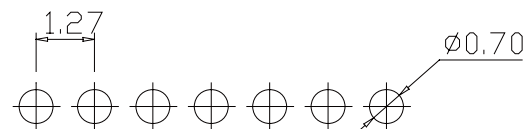

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

MATERIAL

Insulator: Polyester, UL94v-0
 Standard: Nylon 6T
 Contact Pin: Phosphor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

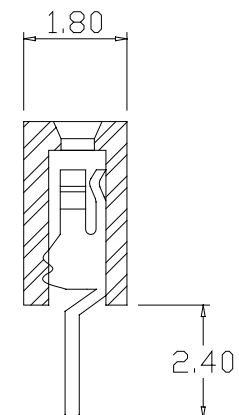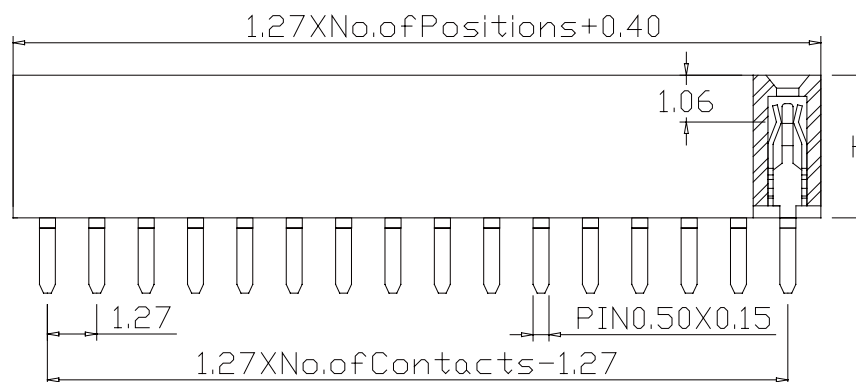

P	S	3	S	X	X	-	1	X	X	X	B	-	U
34:Plastic Height H=3.4mm 44:Plastic Height H=4.4mm							G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" T:Tin Plated TE:Tin200u"					B:BlackInsulator	U:RoHS+Nylon6T
No.of contacts per row (02-50)													

ITEM NO.	PS3SXX-1XXXB-U		
DRAW NO.			
UNIT	mm	SCALE	no
TOLER		NO.	

