


PAGE	83	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,1	1.0


SPECIFICATION
 Currenrent Rate: 1 AMP
 Insulation Rrsistance: 1000mΩMin
 Conract Resistance: 20mΩMax
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40℃to +105℃

MATERIAL
 Insulator: Polyester,UL94v-0
 Standard: Nylon 6T
 Conract Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over


A TYPE

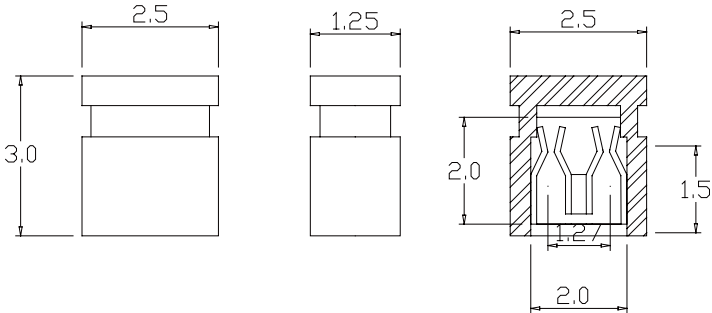

E TYPE

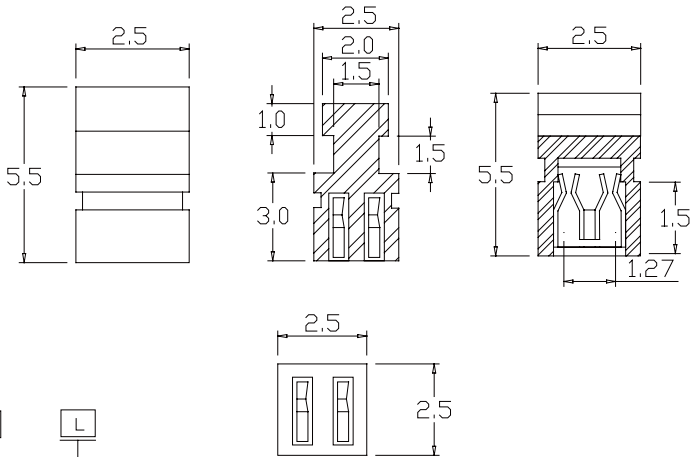

D TYPE

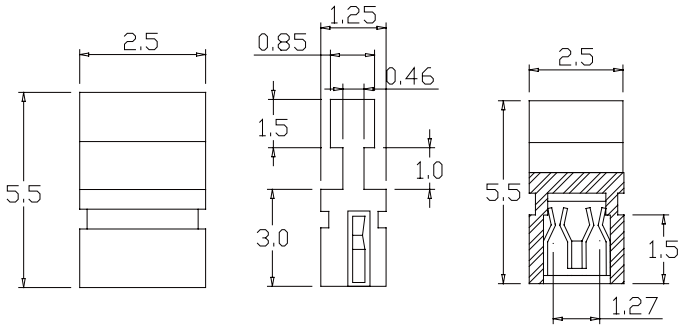

M	J	3	P	-	X	X	X	-	L	
				A:Close 3.0mm D:With Handle 5.5mm E:Multi-Pos		G:Gold flah GA:Gold 5u" GB:Gold 10u" GC:Gold 20u" GD:Gold 30u" T:Tin Plated		S:Selective SA:Selective5u" SB:Selective10u" SC:Selective20" SD:Selective30" TE:Tin200u"		U:RoHS+Nylon6T
						B:BlackInsulator U:Blue Insulator G:Gray Insulator Y:YellowInsulator		R:Red Insulator E:GreenInsulator W:WhiteInsulator		

APPRO	CHECK	DRAWN	PART NO.	MJ3P-XXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	