
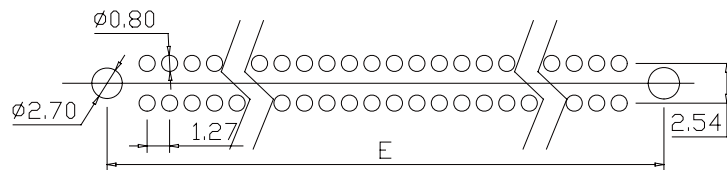
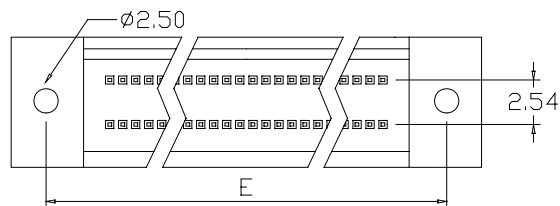
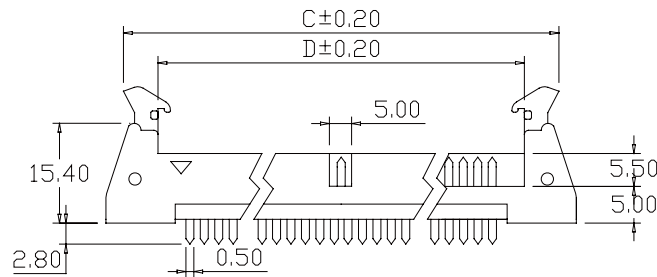




SPECIFICATION


Current Rate: 0.5 AMP
Insulation Resistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -55°C to +105°C

MATERIAL


Insulator: Polyester, UL94v-0
Standard: Nylon 6T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

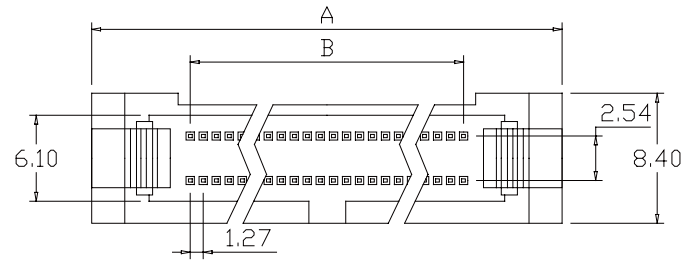

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



CIRCUITS	DIMENSION				
	A	B	C	D	E
20	32.36	11.43	29.35	18.75	21.59
26	36.18	15.24	33.16	22.56	25.40
32	39.98	19.05	36.97	26.37	29.21
34	41.25	20.32	38.24	27.64	30.48
40	45.06	24.13	42.05	31.45	34.29
50	51.41	30.48	48.40	37.80	40.64
52	52.68	31.75	49.67	39.07	41.91
60	57.76	36.83	54.75	44.15	46.99
68	62.84	41.91	59.83	49.23	52.07
80	70.46	49.53	67.45	56.85	59.69
100	83.16	62.23	80.25	69.55	72.39

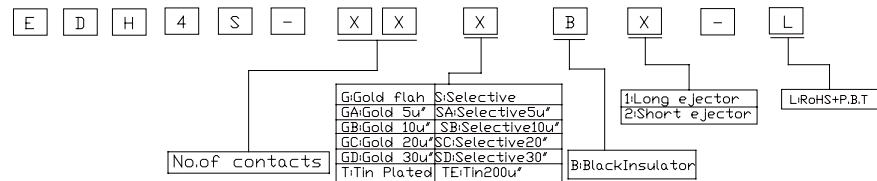

APPRO	CHECK	DRAWN	PART NO.	EDH4S-XXXBX-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com

