

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 1000mΩ Min

Contract Resistance: 20mΩ Max

Dielectric voltage: 500V AC for

Operation Temperature: -40°C to +105°C

MATERIAL



Insulator: Polyester,UL94v-0

©Standard: Nylon 6T



Contract Pin: Phospor Bronze

Finish: Tin, Gold Plated


©Standard: Gold Flash all over

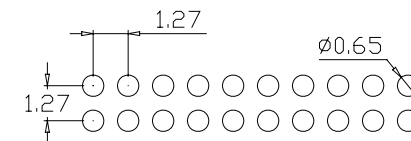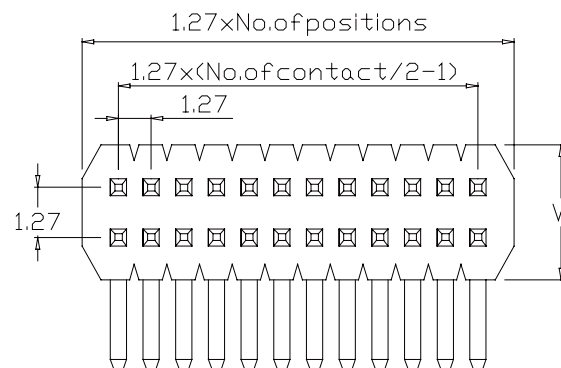

Recommended PCB Layout
(PCB Tolerance $\pm 0,05$)

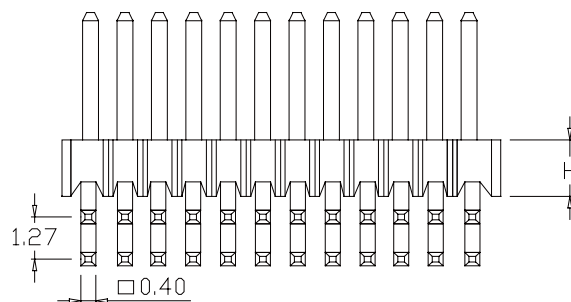

	w
H=0.85	3.40
H=1.0	3.40
H=1.5	3.40
H=1.7	3.00
H=2.0	3.00
H=2.5	3.00

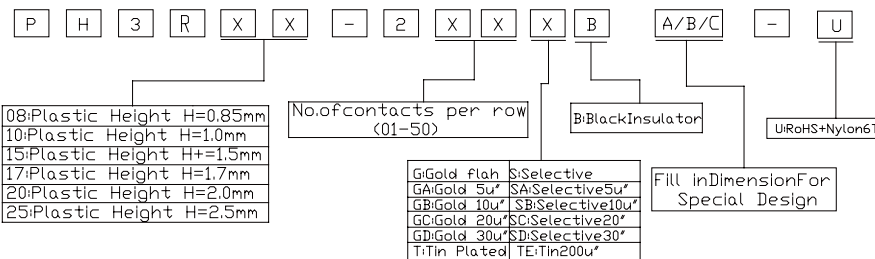

APPRO	CHECK	DRAWN	PART NO.	PH3RXX-2XXXBA/B/C-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
						Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com		