

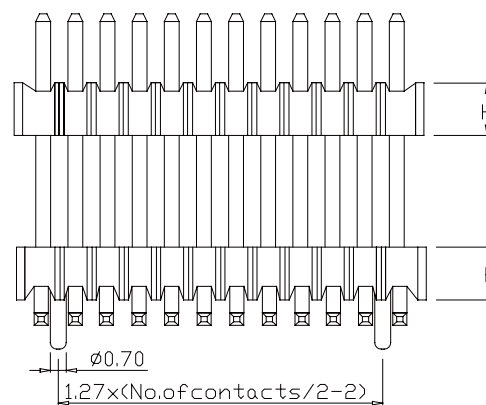


SPECIFICATION


Current Rate: 1 AMP
Insulation Resistance: 1000mΩ Min
Contract Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Polyester, UL94v-0
 Standard: Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

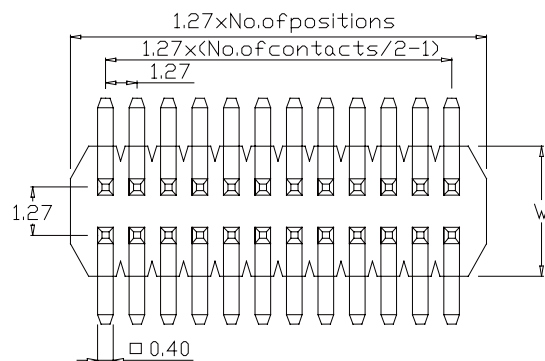

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

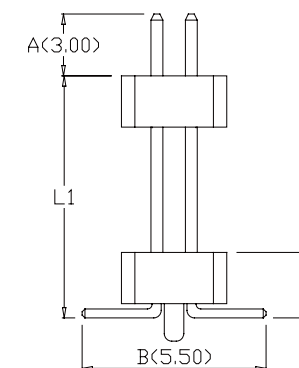

	C	W
H=0.85	1.30	3.4
H=1.0	1.50	3.4
H=1.5	2.00	3.4
H=1.7	2.20	3.0
H=2.0	2.50	3.0
H=2.5	3.00	3.0

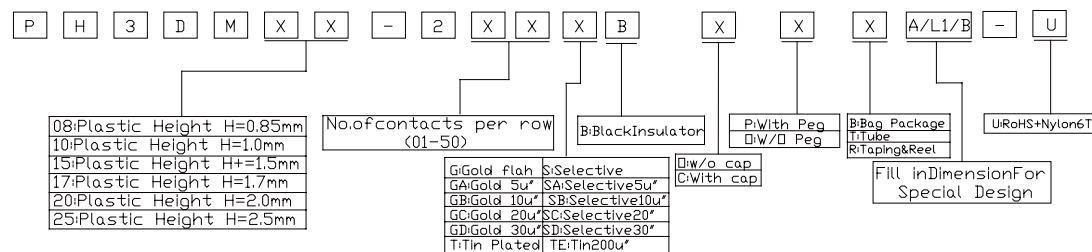

APPRO	CHECK	DRAWN	PART NO.	PH3DMXX-2XXXBXXXXA/L1/B-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com	

