

SPECIFICATION

Current Rate: 1.5 AMP

Insulation Resistance: 1000mΩ Min

Contract Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL



Insulator: Polyester,UL94v-0

©Standard: Nylon 6T or P.B.T


Contract Pin: Brass

Finish: Tin, Gold Plated

©Standard: Gold Flash all over

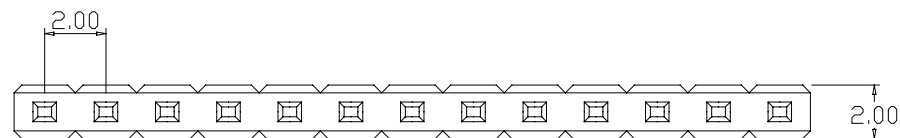

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

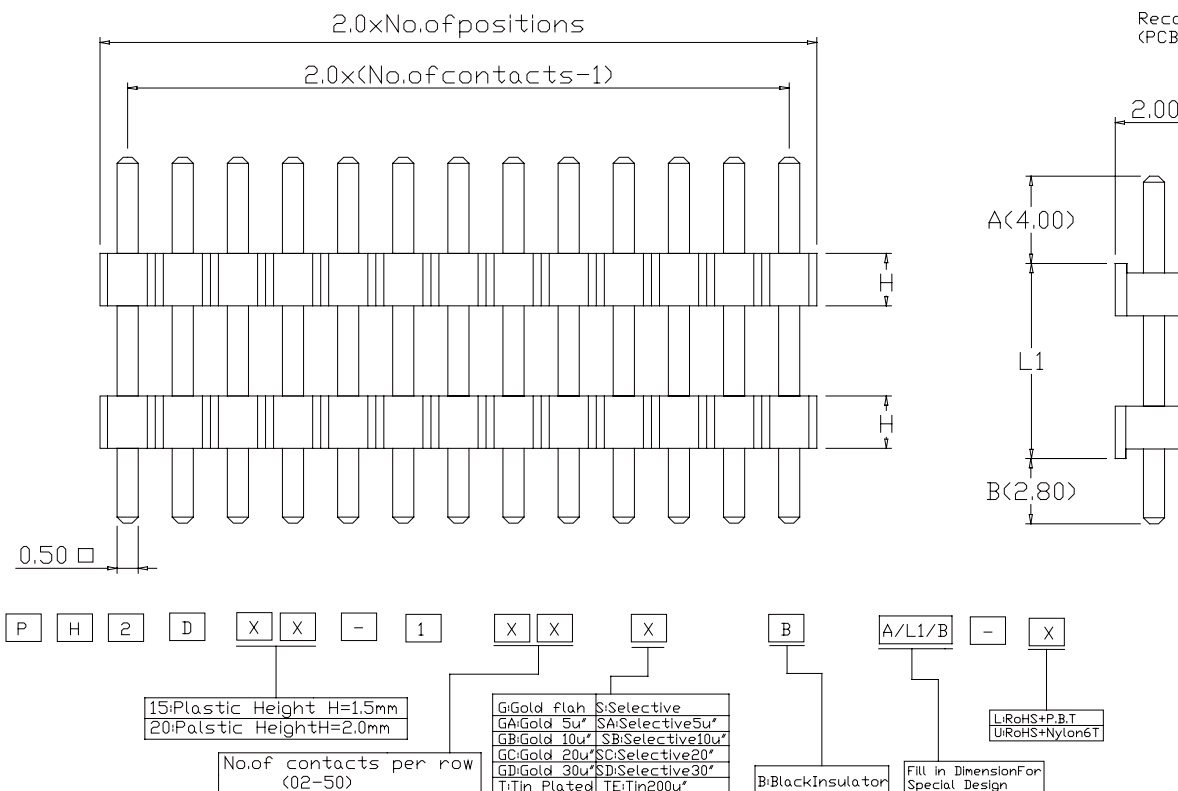

APPRO	CHECK	DRAWN	PART NO.	PH2DXX-1XXXBA/L1/B-X			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO		Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com	