
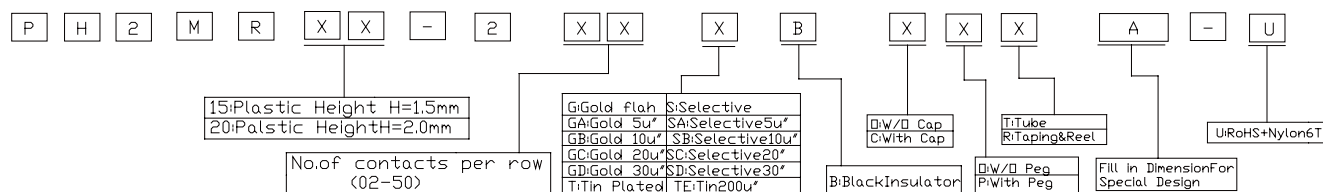


Current Rate: 1.5 AMP
 Insulation Resistance: 1000m Ω Min
 Contact Resistance: 20m Ω Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Insulator: Polyester,UL94v-0
 ◎Standard: Nylon 6T
 Conract Pin: Brass
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

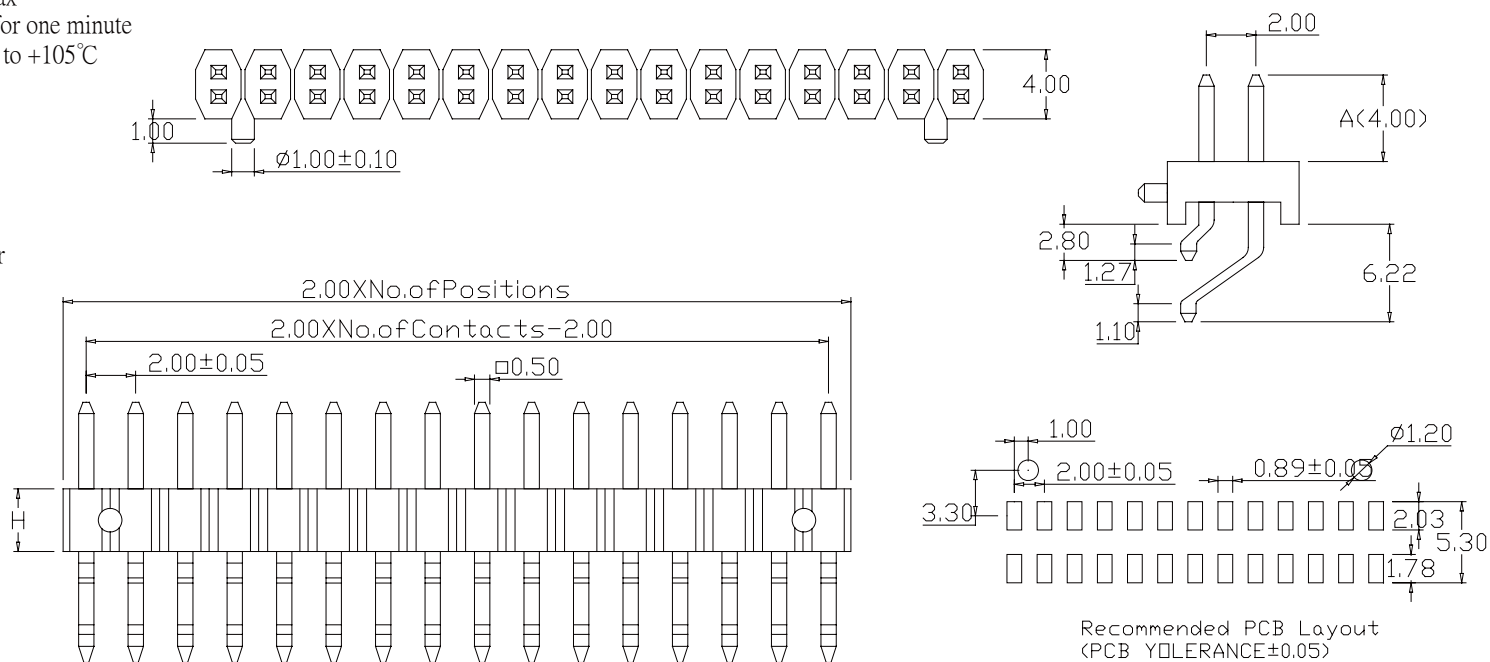

APPRO	CHECK	DRAWN	PART NO.	PH2MRXX-2XXXBXXXA-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		