
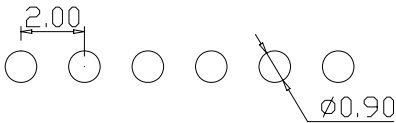



PAGE	94	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,1	1.0

SPECIFICATION
 Currenrt Rate: 1.5 AMP
 Insulation Rrsistance: 1000mΩMin
 Conract Resistance: 20mΩMax
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40℃to +105℃

MATERIAL
 Insulator: Polyester,UL94v-0
 ©Standard: Nylon 6T
 Conract Pin: Brass
 Finish: Tin, Gold Plated
 ©Standard: Gold Flash all over

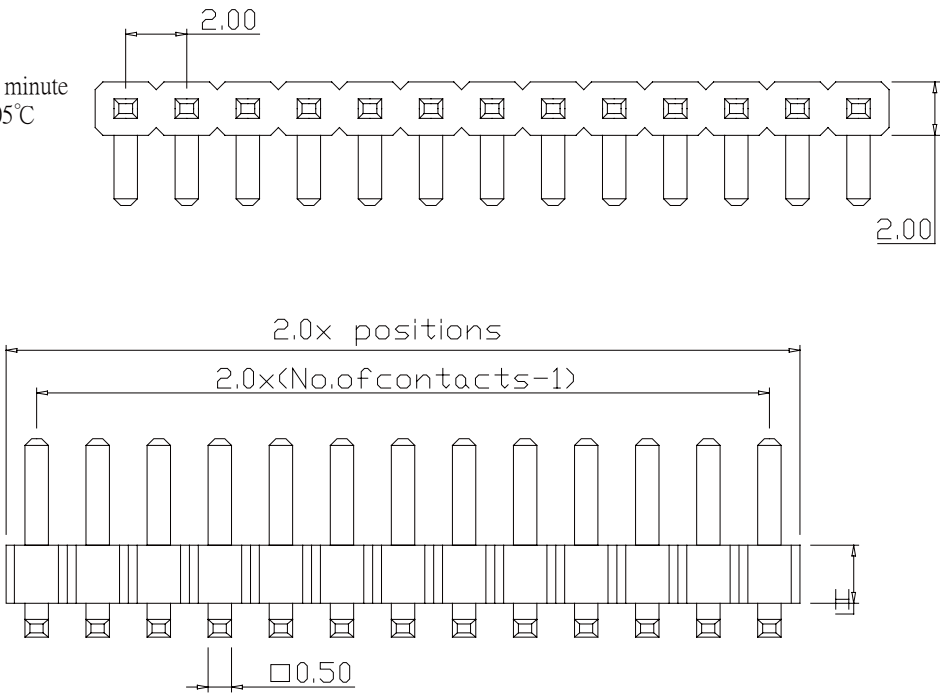

Recommended PCB Layout
 (PCB YDLERANCE±0.05)

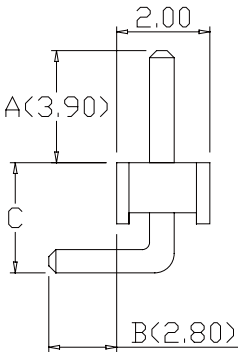

P

H

2

R

X

X

-

1

X

X

X

B

A/B/C

-

X

15:Plastic Height H=1.5mm

20:Palstic HeightH=2.0mm

No.of contacts per row (02-50)

Gi:Gold flah

GA:Gold 5u"

GB:Gold 10u"

GC:Gold 20u"

GD:Gold 30u"

T:tin Plated

Si:Selective

SA:Selective5u"

SB:Selective10u"

SC:Selective20"

SD:Selective30"

TE:tin200u"

B:BlackInsulator

Fill in DimensionFor Special Design

Li:RoHS+P.B.T

U:RoHS+Nylon6T

Height	Dimc
1.5	2.5
2.0	3.0

APPRO	CHECK	DRAWN	PART NO.	PH2RXX-1XXXBA/B/C-X			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
							Tel:0769 22020068	Fax: 0769 22020069	E-mail: sales@vigortec.com