

SPECIFICATION

Current Rate: 1.5 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

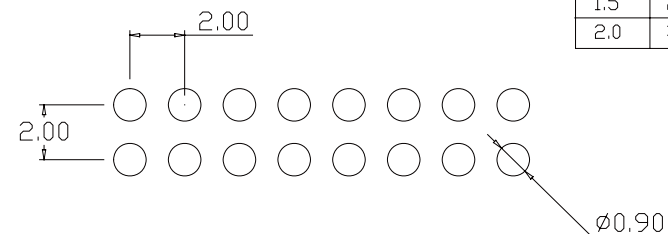
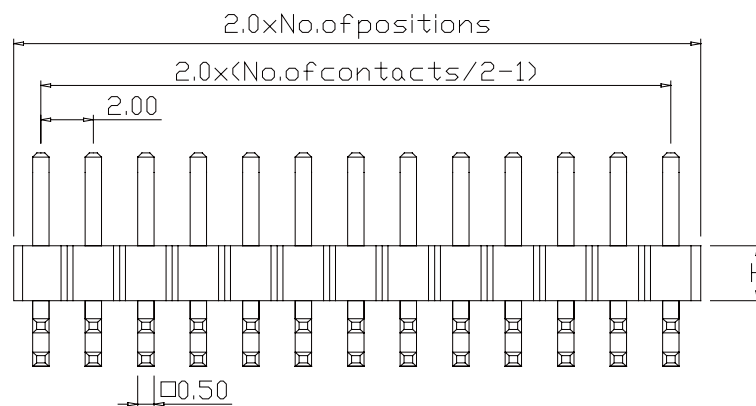

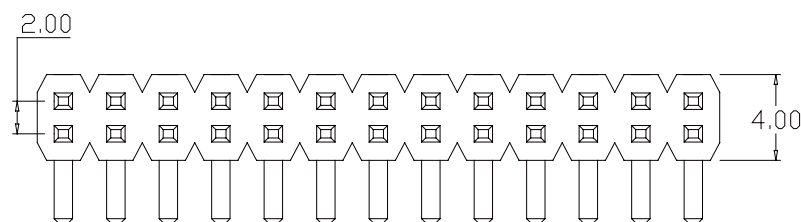
Insulator: Polyester, UL94v-0

Standard: Nylon 6T or P.B.T

Contact Pin: Brass

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Height	DimC
1.5	2.5
2.0	3.0

P	H	2	R	X	X	-	2	X	X	X	B	A/B/C	-	X	
15:Plastic Height H=1.5mm 20:Plastic HeightH=2.0mm								G:Gold flash GA:Gold 5u" GB:Gold 10u" GC:Gold 20u" GD:Gold 30u" T:Tin Plated			S:Selective SA:Selective5u" SB:Selective10u" SC:Selective20" SD:Selective30" TE:Tin200u"			L:RoHS+P.B.T U:RoHS+Nylon6	
No.of contacts per row (02-50)											B:BlackInsulator		Fill in DimensionFor Special Design		

APPRO

CHECK

DRAWN

PART NO.

PH2RXX-2XXXBA/B/C-X

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com