

SPECIFICATION

Current Rate: 1.5 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

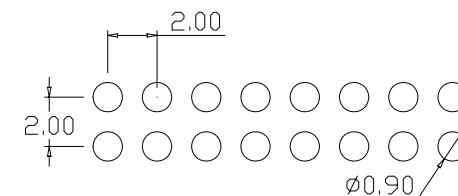
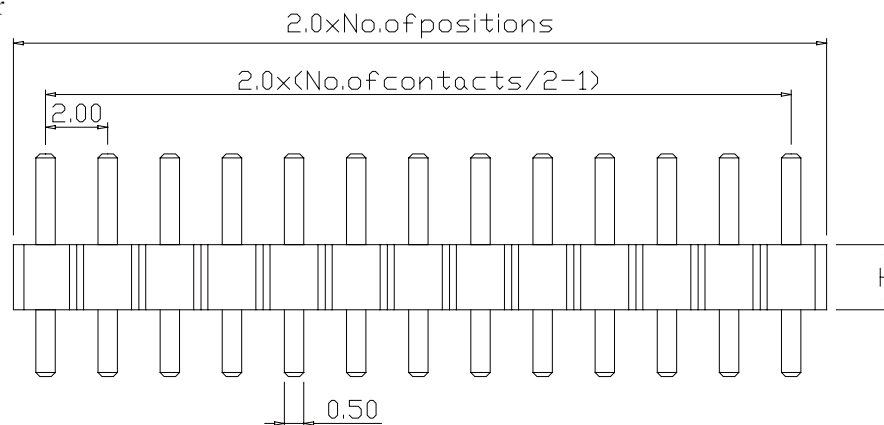
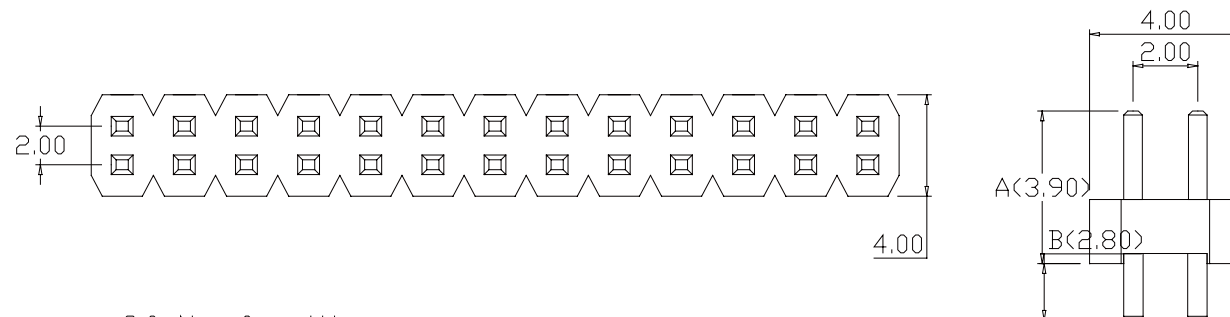
Insulator: Polyester, UL94v-0

Standard: Nylon 6T or P.B.T

Contact Pin: Brass

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

P	H	2	S	X	X	-	2	X	X	X	B	A/B	-	X
15: Plastic Height H=1.5mm 20: Plastic Height H=2.0mm No. of contacts per row (02-50)										G: Gold flash GA: Gold 5u" GB: Gold 10u" GC: Gold 20u" GD: Gold 30u" T: Tin Plated	S: Selective SA: Selective 5u" SB: Selective 10u" SC: Selective 20u" SD: Selective 30u" TE: Tin 200u"	B: Black Insulator	A/B: Fill in Dimension For Special Design	L: RoHS+P.B.T U: RoHS+Nylon6T

PH2SXX-2XXXBA/B-X

DRAW NO.

UNIT

TOLER

mm

SCALE

no

NO.

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com