


|      |     |       |     |                               |          |      |
|------|-----|-------|-----|-------------------------------|----------|------|
| PAGE | 110 | BY    | CHK | REVISION RECORD MODIFICATIONS | DATE     | REV. |
|      |     | ALLEN |     | RELEASE TO PRODUCTION         | 2007,8,2 | 1.0  |

#### SPECIFICATION

Current Rate: 1.5 AMP  
Insulation Resistance: 1000mΩ Min  
Contact Resistance: 20mΩ Max  
Dielectric voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C

#### MATERIAL

Insulator: Polyester, UL94v-0  
Standard: P.B.T or Nylon 6T  
Contact Pin: Phosphor Bronze  
Finish: Tin, Gold Plated  
Standard: Gold Flash all over

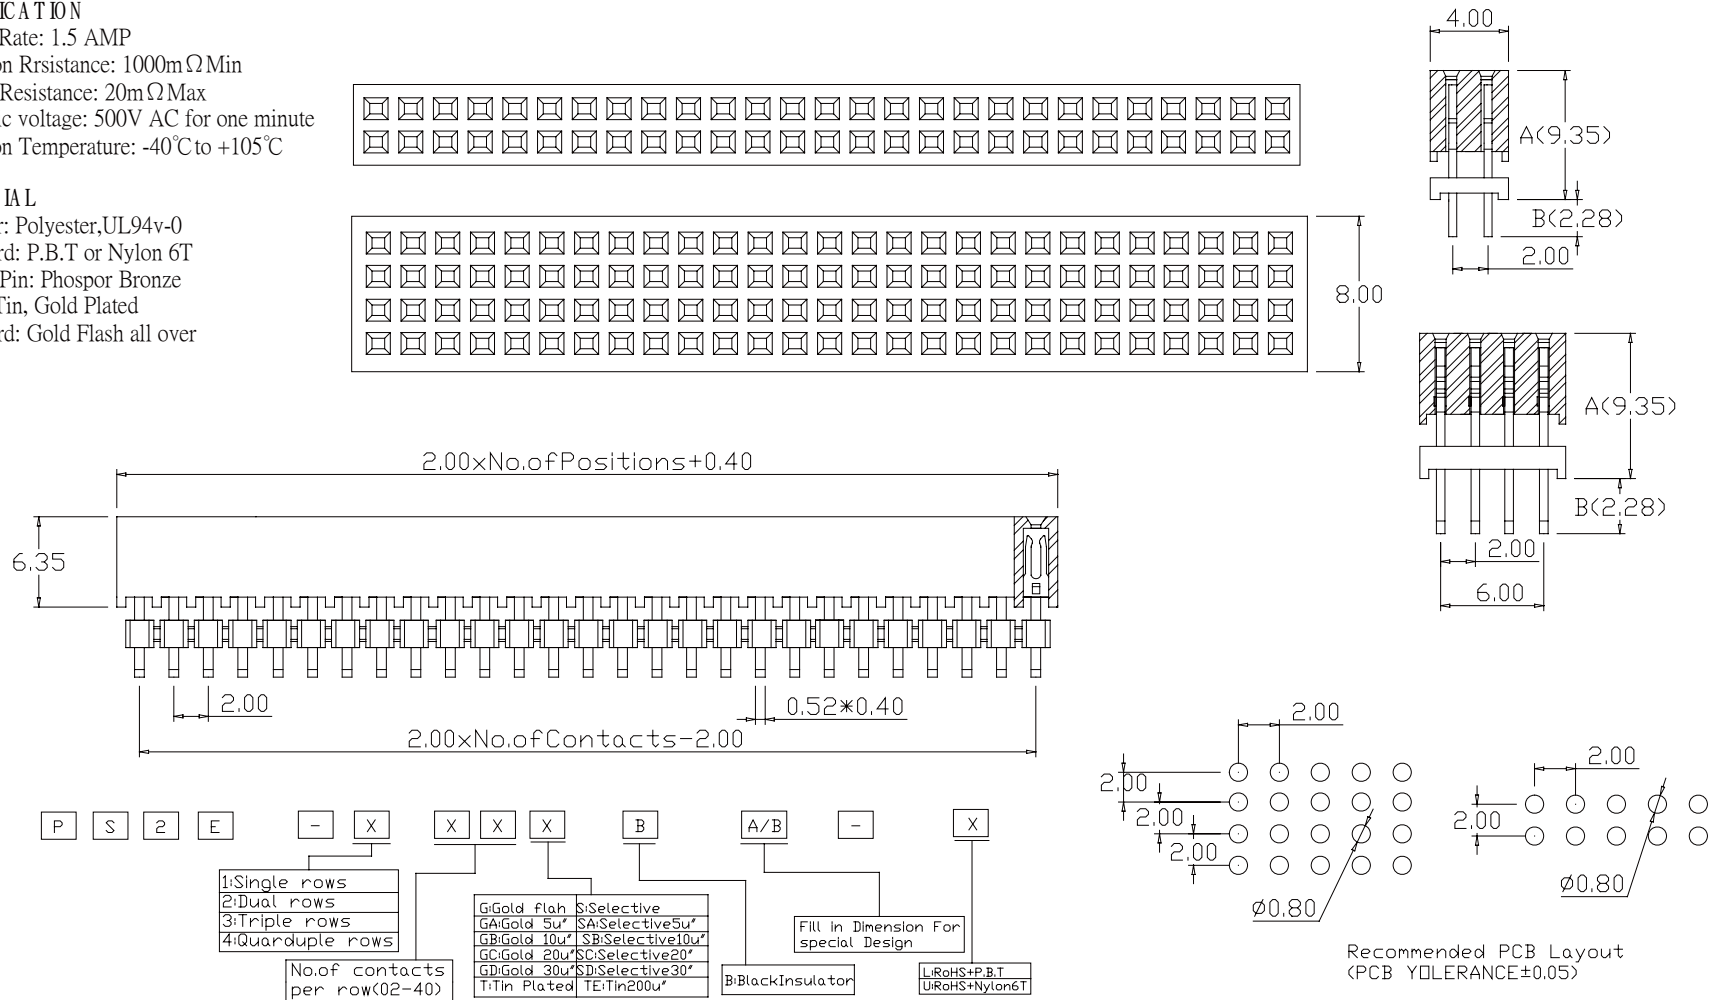

|       |       |       |          |                 |       |    |                                                                        |                                                                                       |
|-------|-------|-------|----------|-----------------|-------|----|------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| APPRO | CHECK | DRAWN | PART NO. | PS2E-XXXXBA/B-X |       |    | DESCRIPTION                                                            |  |
|       |       |       | ITEM NO. |                 |       |    |                                                                        |                                                                                       |
|       |       |       | DRAW NO. |                 |       |    |                                                                        |                                                                                       |
|       |       |       | UNIT     | mm              | SCALE | no |                                                                        |                                                                                       |
|       |       |       | TOLER    |                 | NO.   |    | Tel: 0769 22020068    Fax: 0769 22020069    E-mail: sales@vigortec.com |                                                                                       |