





PAGE	107	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION

Current Rate: 1.5 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0
Standard: Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

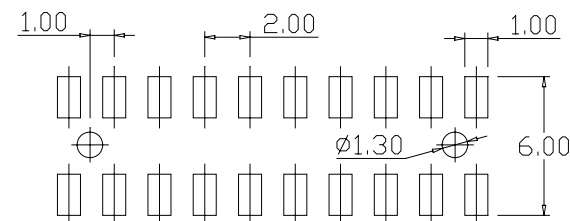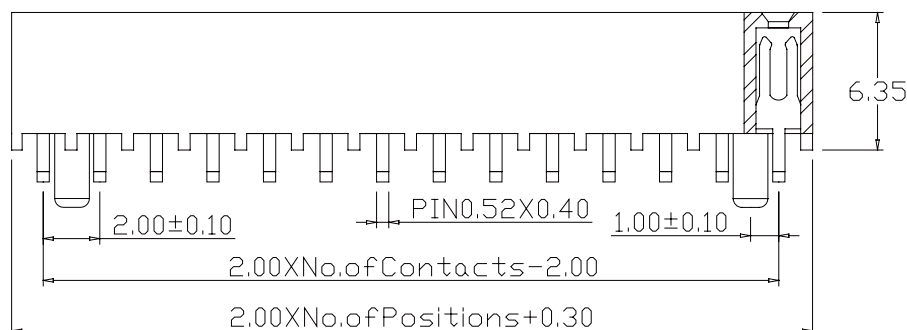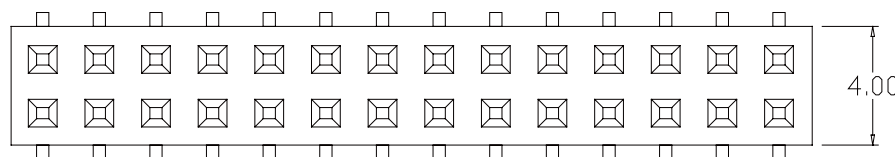

Recommended PCB Layout
(PCB TOLERANCE±0.05)

P	S	2	M	6	3	-	2	X	X	X	B	X	X	X	-	U	
No.of contacts per row (02-40)								G:Gold flash		S:Selective		D:W/O Cap C:With Cap		T:Tube R:Taping&Reel		U:RoHS+Nylon6T	
								GA:Gold 5u"		SA:Selective5u"							
								GB:Gold 10u"		SB:Selective10u"		B:BlackInsulator		D:W/O Peg P:With Peg			
								GC:Gold 20u"		SC:Selective20"							
								GD:Gold 30u"		SD:Selective30"							
								T:Tin Plated		TE:Tin200u"							

APPRO	CHECK	DRAWN	PART NO.	DESCRIPTION				
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel:0769 22020068 Fax: 0769 22020069			E-mail: sales@vigortec.com	