




PAGE	113	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION


Current Rate: 1.5 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

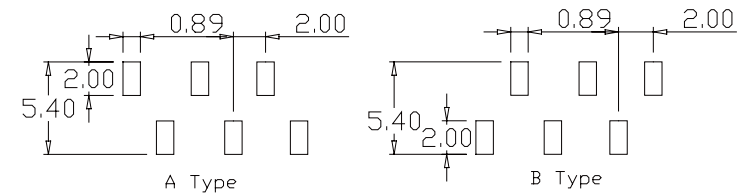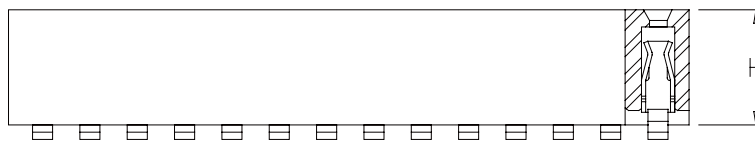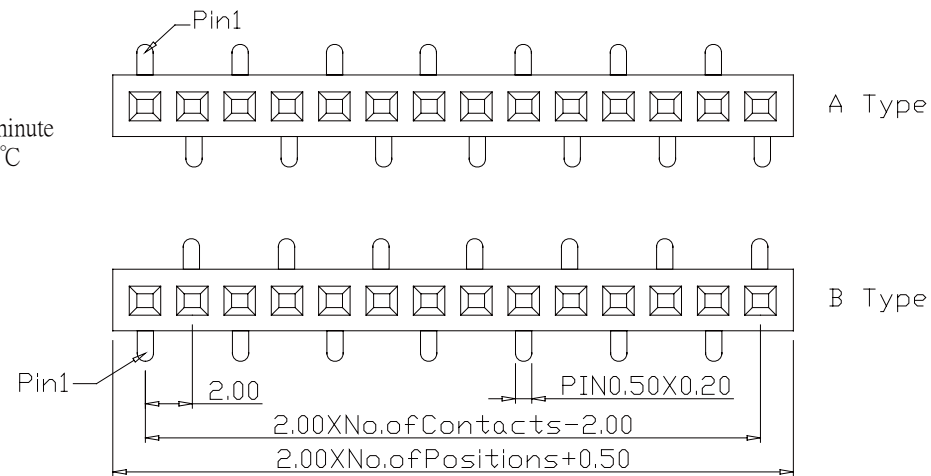

Recommended PCB Layout
(PCB TOLERANCE±0.05)

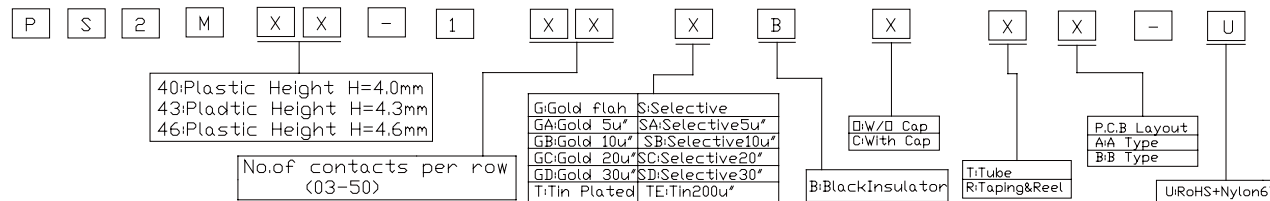

APPRO	CHECK	DRAWN	PART NO.	PS2MXX-1XXXXBXXX-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com