

SPECIFICATION

Current Rate: 1.5 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

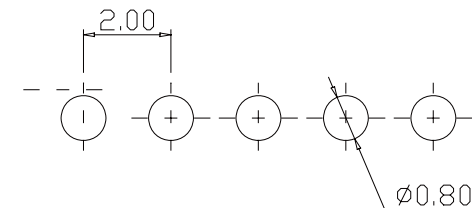
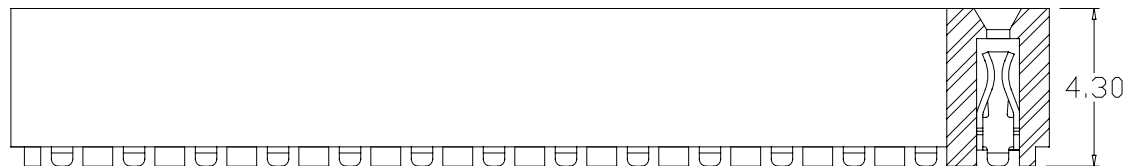

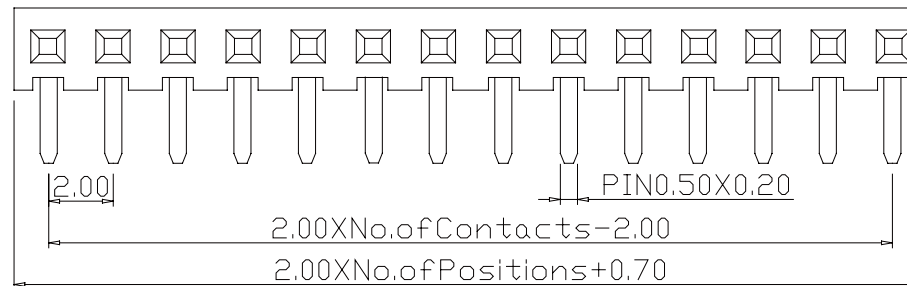
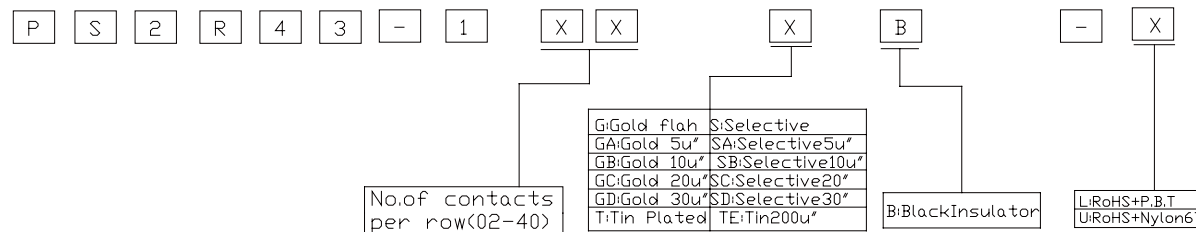
Insulator: Polyester, UL94v-0

Standard: P.B.T or Nylon 6T

Contact Pin: Phosphor Bronze

Finish: Tin, Gold Plated

Standard: Gold Flash all over

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

PS2R43-1XXXB-X

