PAGE	112

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION
Current Rate: 1.5 AMP
Insulation Rrsistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40℃to +105℃

MATERIAL
Insulator: Polyester,UL94v-0
◎Sandard: P.B.T or Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
◎Sandard: Gold Flash all over

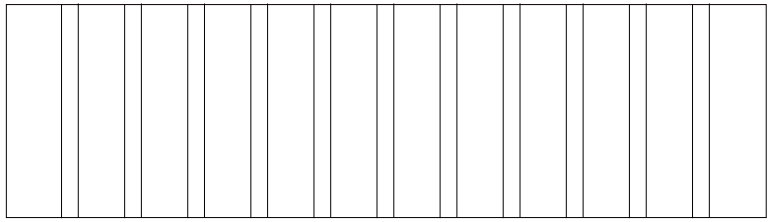



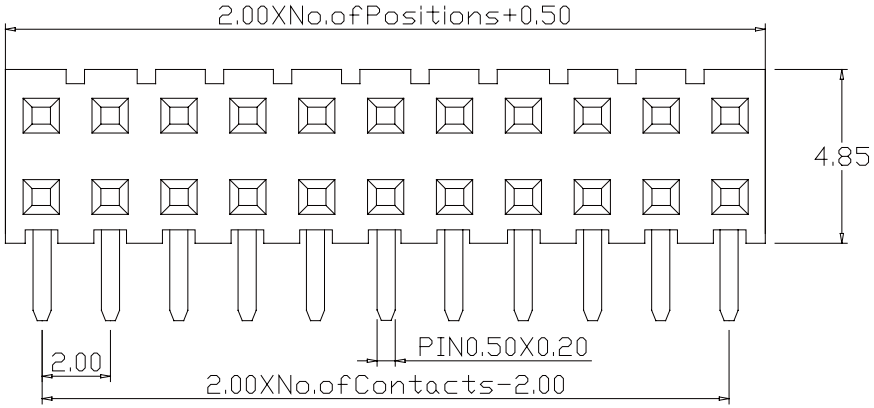

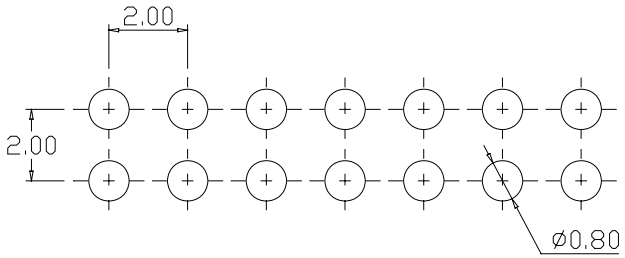

Recommended PCB Layout
(PCB YOLERANCE±0.05)

P	S	2	R	4	9	-	2	X	X	X	B	-	X

No.of contacts per row(02-40)

G:Gold flah	S:Selective
GA:Gold 5u"	SA:Selective5u"
GB:Gold 10u"	SB:Selective10u"
GC:Gold 20u"	SC:Selective20"
GD:Gold 30u"	SD:Selective30"
T:Tin Plated	TE:Tin200u"

B:BlackInsulator

L:RoHS+P.B.T
U:RoHS+Nylon6T

APPRO	CHECK	DRAWN	PART NO.	PS2R49-2XXXB-X			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com