




PAGE	108	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION





Current Rate: 1.5 AMP
Insulation Rrsistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0
Standard: P.B.T or Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

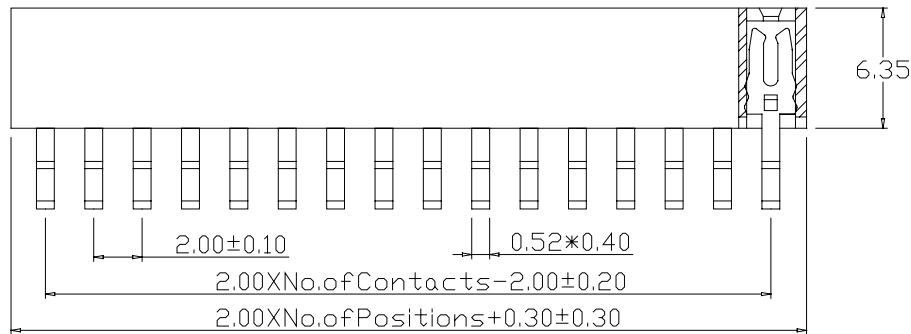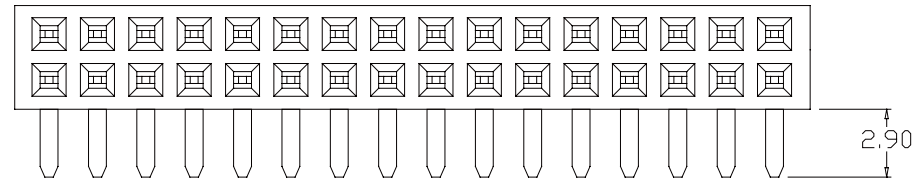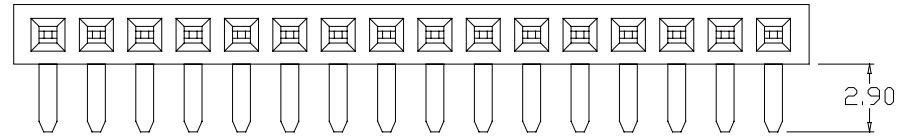

P	S	2	R	6	3	-	X	X	X	B	-	X
				1:Single rows		2: Dual rows		No.of contacts per row(02-40)		G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" T: Tin Plated TE: Tin200u"		B:Black Insulator
										L:RoHS+P.B.T U:RoHS+Nylon6T		

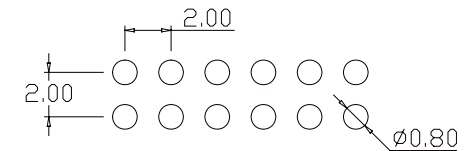

Recommended PCB Layout
(PCB TOLERANCE±0.05)

APPRO	CHECK	DRAWN	PART NO.	PS2R63-XXXXB-X	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com						