
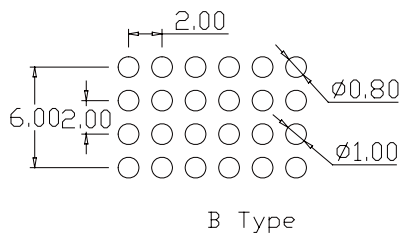
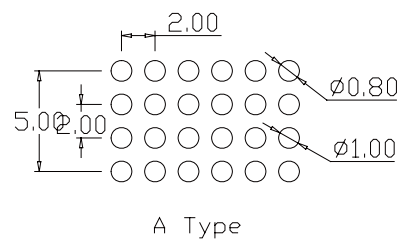
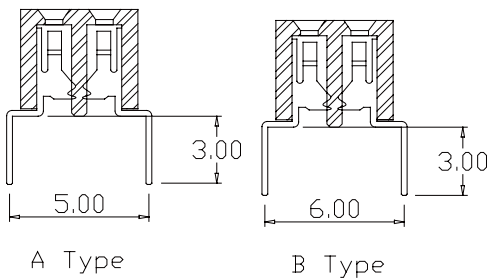
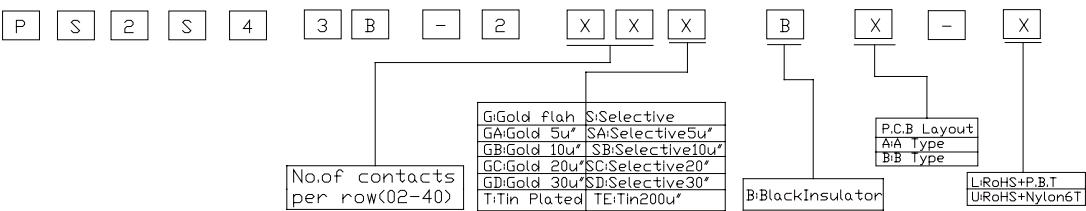
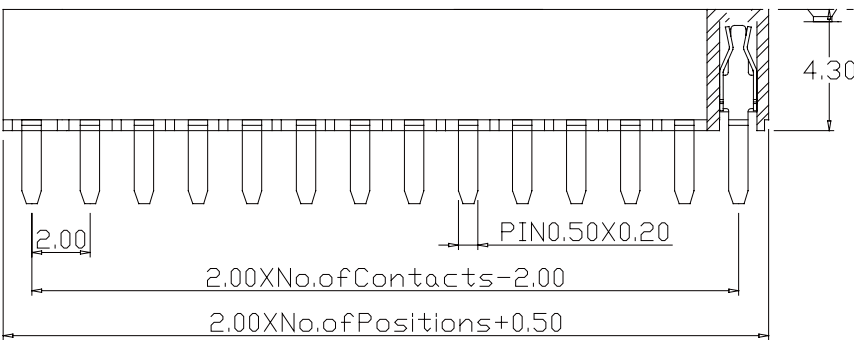


PAGE	106	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION
 Current Rate: 1.5 AMP
 Insulation Rrsistance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40℃ to +105℃

MATERIAL
 Insulator: Polyester,UL94v-0
 ◎Standard: P.B.T or Nylon 6T
 Contact Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

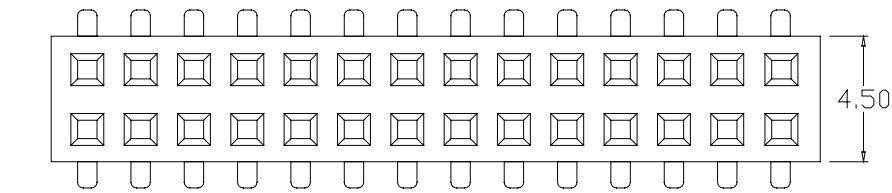

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

APPRO	CHECK			PS2S43B-2XXXBX-X			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	