
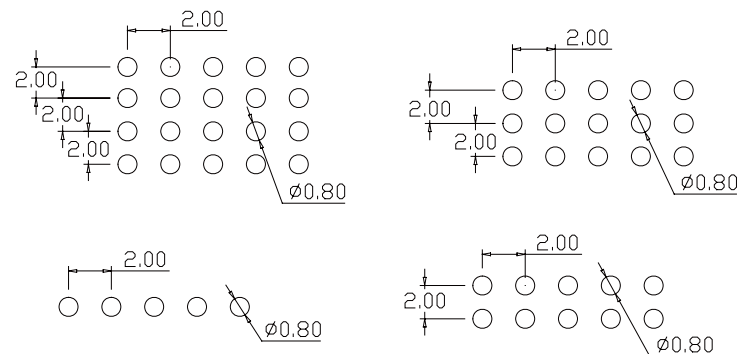
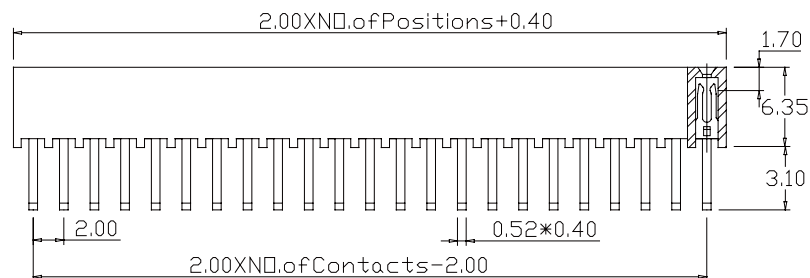
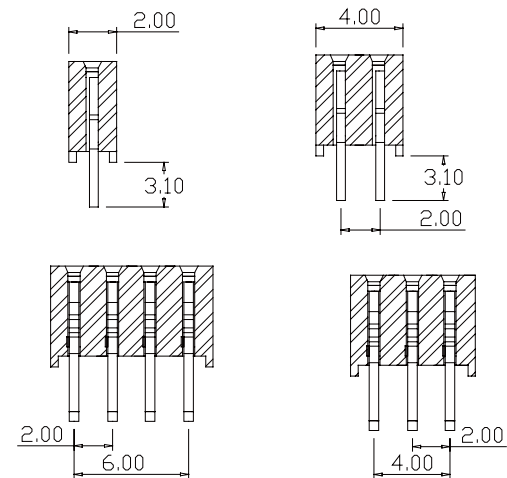


Current Rate: 1.5 AMP
Insulation Rsristance: 1000m Ω Min
Contact Resistance: 20m Ω Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Insulator: Polyester,UL94v-0
 ◎Standard: P.B.T or Nylon 6T
 Contact Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

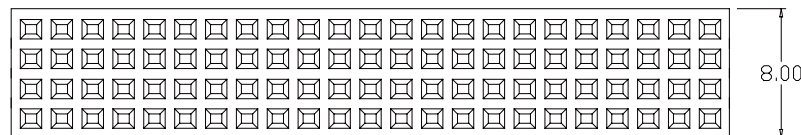

Recommended PCB Layout
(PCB TOLERANCE $\pm$ 0.05)

APPRO	CHECK	DRAWN	PART NO.	PS2S63-XXXXB-X			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com			