


PAGE	111	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION

Current Rate: 1.5 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: P.B.T or Nylon 6T
SMT TYPE: Nylon 6T
Contact Pin: Phosphor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

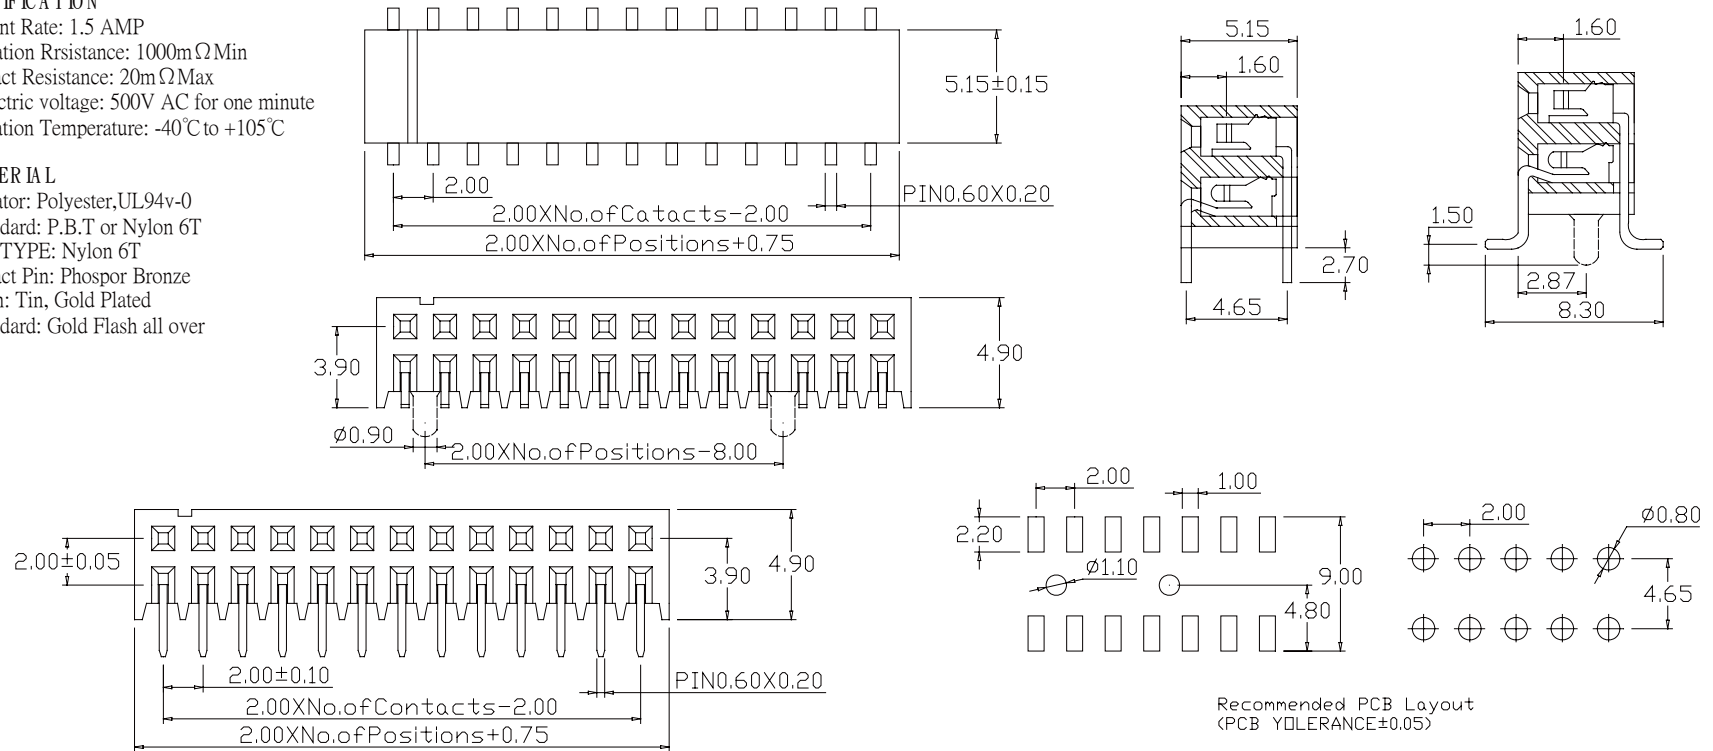

P	S	2	X	S	-	2	X	X	X	B	X	X	-	X
MS:SMT Type RS:Dip Type							G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" TI: Tin Plated TE:Tin200u"				D:W/O Peg P:With Peg (Option for SMT Type)		L:RoHS+P.B.T U:RoHS+Nylon6T	
No. of contacts per row(02-40)											B:Black Insulator		T:Tube R:Taping&Reel	

APPRO	CHECK	DRAWN	PART NO.	PS2XS-2XXXBXX-X	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE no	
			TOLER		NO.	
					Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	