BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,8,2	1.0

SPECIFICATION
Current Rate: 1.5 AMP
Insulation Rrsistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -40℃to +105℃

MATERIAL
Insulator: Polyester,UL94v-0
◎Sandard: P.B.T
Contact Pin: Phospor Bronze or Brass
Finish: Tin, Gold Plated
◎Sandard: Gold Flash all over

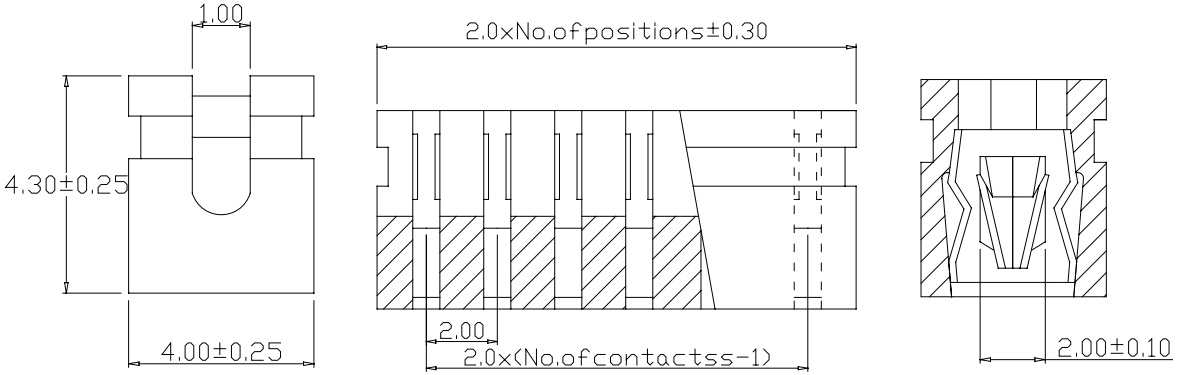

M J 2 X - E X X X B - L

- X → B:Brass / P:Phospor Bronze
- X X → No.of contacts per row (02~10)
- X → G:Gold flah / GA:Gold 5u" / GB:Gold 10u" / GC:Gold 20u" / GD:Gold 30u" / T:Tin Plated / S:Selective / SA:Selective5u" / SB:Selective10u" / SC:Selective20" / SD:Selective30" / TE:Tin200u"
- B → B:BlackInsulator
- L → L:RoHS+P.B.T

APPRO	CHECK	DRAWN	PART NO.	MJ2X-EXXXB-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com