



SPECIFICATION

Current Rate: 1.5 AMP
 Insulation Resistance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
 Standard: P.B.T
 Contact Pin: Phosphor Bronze or Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

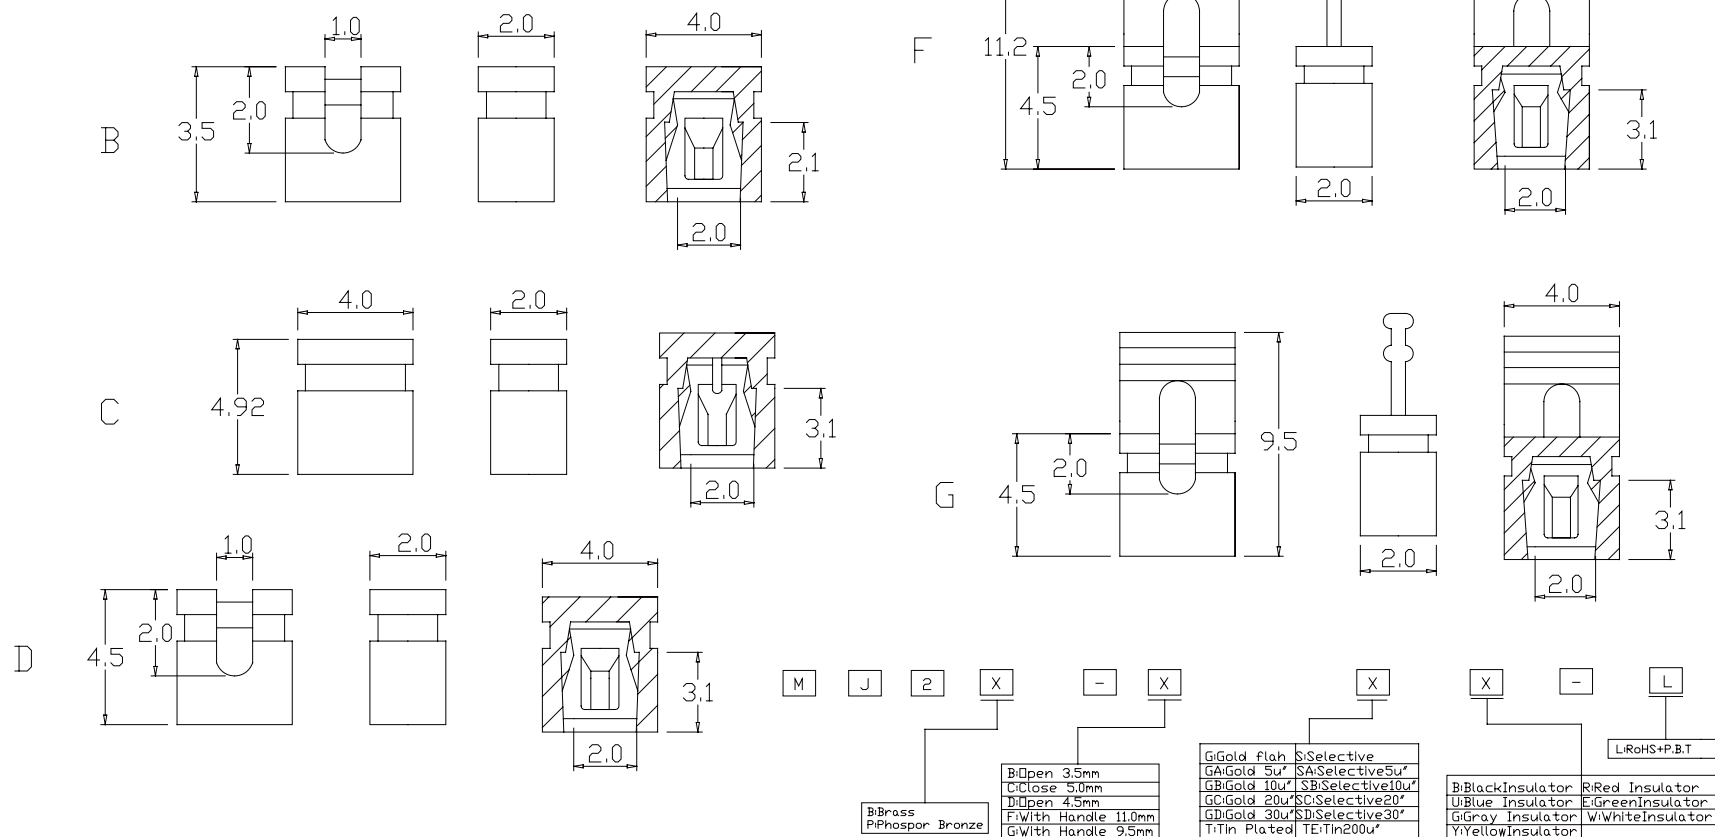

APPRO	CHECK	DRAWN	PART NO.	MJ2X-XXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		