





PAGE	127	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,3	1.0

SPECIFICATION

Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T or P.B.T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

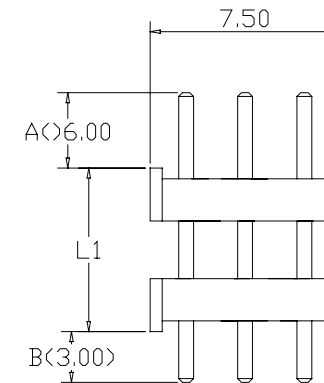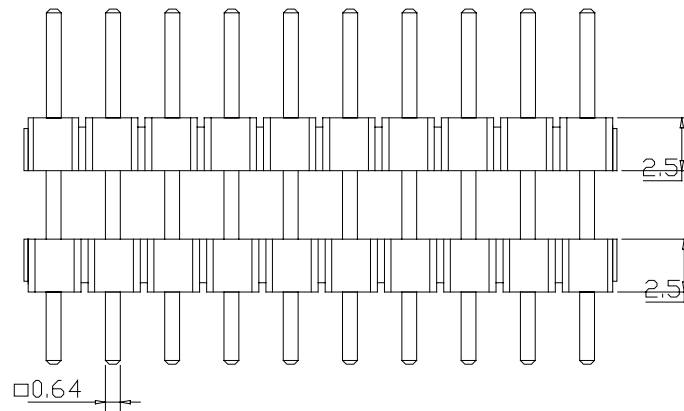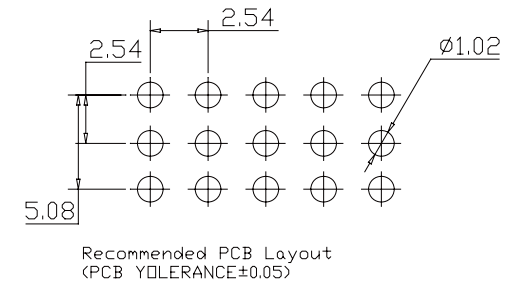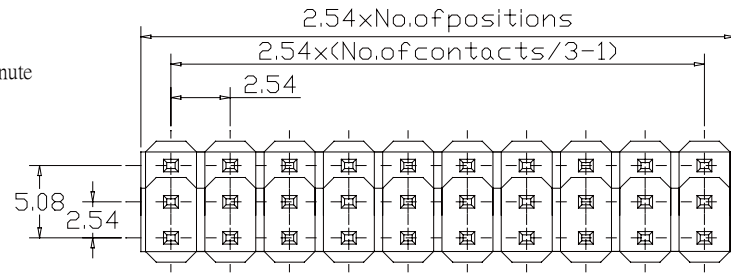

P	H	1	D	-	3	X	X	X	X	A/L1/C	-	X			
No. of contacts per row (01-50)						G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" TI:Tin Plated TE:Tin200u"				B:Black Insulator W:White Insulator N:Nylon Natural		Fill in DimensionFor Special Design		L:RoHS+P.B.T U:RoHS+Nylon6	

APPRO	CHECK	DRAWN	PART NO.	PH1D-3XXXX-A/L1/B-X			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	