
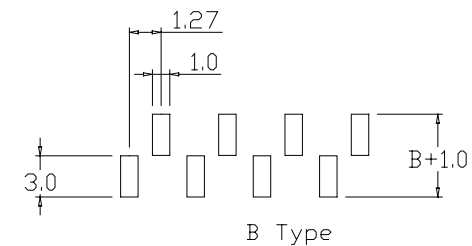
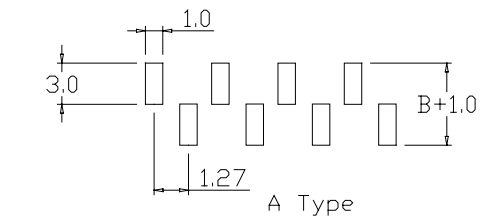
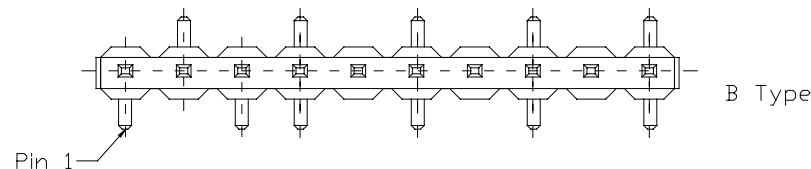


SPECIFICATION

Current Rate: 3 AMP
 Insulation Rrsistance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C




MATERIAL

Insulator: Polyester, UL94v-0
 Standard: Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

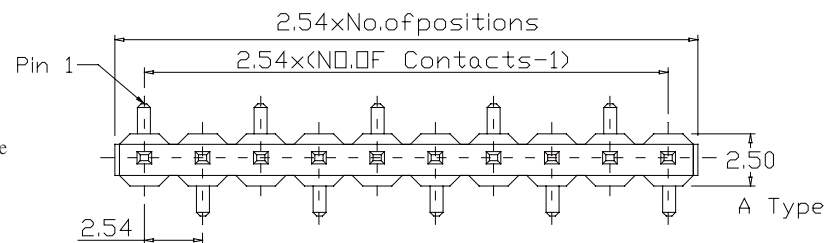

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

DimC		
H=1.5	H=1.7	H=2.5
2.3	2.5	3.3

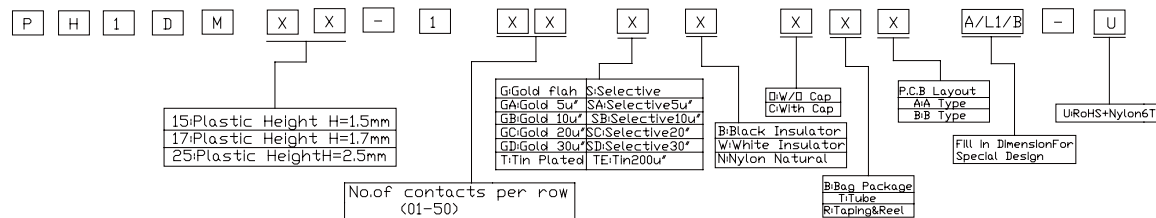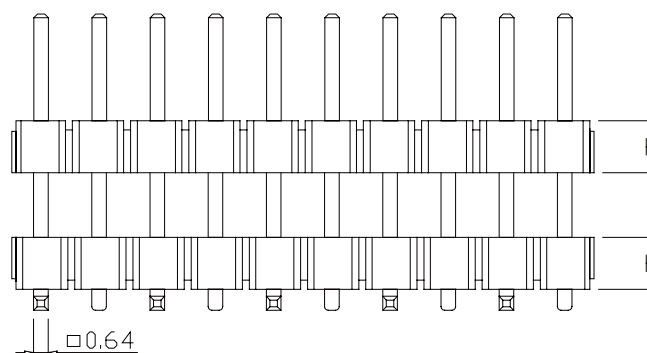

15Plastic Height H=1.5mm
 17Plastic Height H=1.7mm
 25Plastic HeightH=2.5mm

Gold flash S>Selective
 GA Gold 5u" SA Selective5u"
 GB Gold 10u" SB Selective10u"
 GC Gold 20u" SC Selective20u"
 GD Gold 30u" SD Selective30u"
 TE Tin Plated TE Tin200u"

W/O Cap
 C/With Cap
 B:Black Insulator
 W:White Insulator
 N:Nylon Natural

P.C.B Layout
 A: A Type
 B: B Type

U:RoHS+Nylon6T

No. of contacts per row
 (01-50)

B: Bag Package
 T: Tube
 R: Taping & Reel

APPRO	CHECK	DRAWN	PART NO.	PH1DMXX-1XXXXXXXXXA/L1/B-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				