
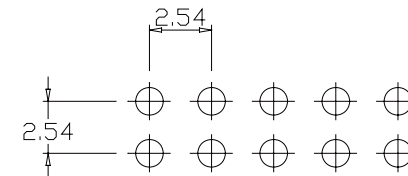


SPECIFICATION



Current Rate: 3 AMP
 Insulation Rsristance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
 Standard: Nylon 6T or P.B.T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

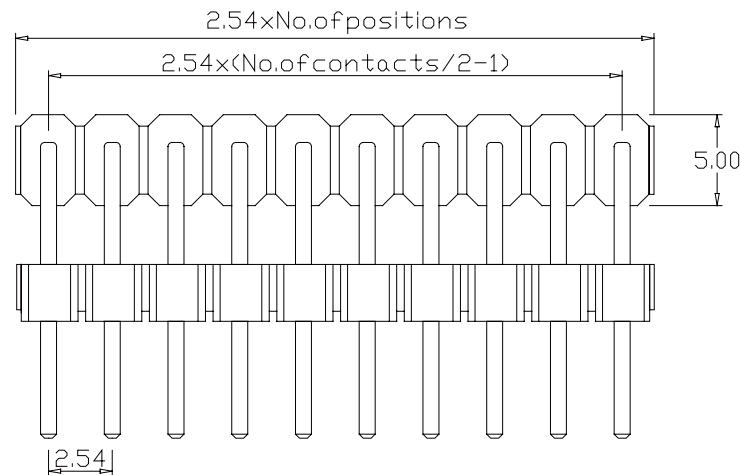

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

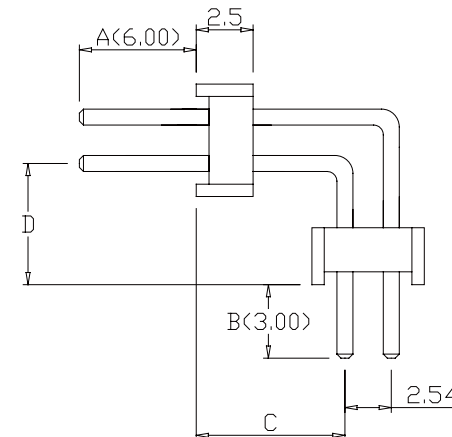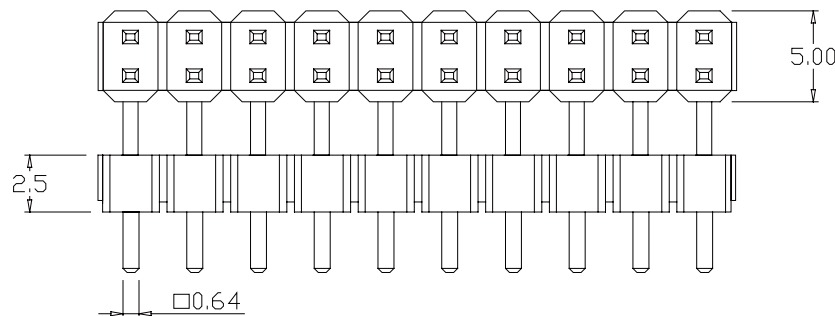

P	H	1	D	R	-	2	X	X	X	X	A/B/C/D	-	X	
No. of contacts per row (01-50)							G: Gold flash S: Selective GA: Gold 5u" SA: Selective 5u" GB: Gold 10u" SB: Selective 10u" GC: Gold 20u" SC: Selective 20u" GD: Gold 30u" SD: Selective 30u" T: Tin Plated TE: Tin 200u"		B: Black Insulator W: White Insulator N: Nylon Natural		Fill in Dimension For Special Design		L: RoHS+P.B.T U: RoHS+Nylon 6T	

APPRO	CHECK	DRAWN	PART NO.	PH1DR-2XXXXA/B/C/D-X			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com	